



8165 E. Kaiser Blvd. Anaheim, CA 92808
 www.lightlaboratory.com

Photometric Test Report

IES FLOOD REPORT
PHOTOMETRIC FILENAME : L092110502.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] L092110502
 [TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)
 [ISSUEDATE] 9/23/21
 [MANUFAC] USTE dba Vista Professional Outdoor Lighting
 [LUMCAT] 1052-X-WG-30-B-MV-ND
 [LUMINAIRE] LED LINEAR FLOODLIGHT-WALL GRAZER
 [BALLASTCAT] ERP PSB40W-1400-27
 [_TOTALLUMINAIRELUMENS] 3628.6
 [INPUT] 120VAC
 [TEST PROCEDURE] IESNA:LM-79-08
 [OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND SHOULD NOT BE FACTORED FOR DIFFERENT LAMP P

Note: Candela values converted from Type-C to Type-B

CHARACTERISTICS


NEMA Type	7 H x 4 V
Maximum Candela	5253.4
Maximum Candela Angle	-1H -5V
Horizontal Beam Angle (50%)	87.2
Vertical Beam Angle (50%)	20.0
Horizontal Field Angle (10%)	145.5
Vertical Field Angle (10%)	53.1
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	1470
Beam Efficiency	N.A.
Field Lumens	3395
Field Efficiency	N.A.
Spill Lumens	239
Luminaire Lumens	3635
Total Efficiency	N.A.
Total Luminaire Watts	35.46
Ballast Factor	1.00

IES FLOOD REPORT
PHOTOMETRIC FILENAME : L092110502.IES

AXIAL CANDELA


DEG.	HOR.	DEG.	VERT.
90	5.18	90	.41
85	6.82	85	.41
75	198.9	75	2.73
65	712.81	65	7.5
55	1267.23	55	16.1
47.5	1741.84	47.5	37.11
42.5	2022.05	42.5	59.62
37.5	2323	37.5	86.76
33	2587.12	33	113.18
29	2714.32	29	137.22
25.5	2714.03	25.5	165.77
22.5	2934.72	22.5	635.39
19.5	3179.05	19.5	1167.5
17	3297.06	17	1500.37
15	3391.46	15	1766.67
13	3442.21	13	1860.53
11	3492.96	11	1954.39
9	3537.43	9	2093.54
7	3575.63	7	2277.98
5	3613.83	5	2462.42
3	3632.38	3	2806.76
1	3667.01	1	3369.34
0	3687	0	3687
-1	3695.93	-1	4073.28
-3	3710.97	-3	4767.15
-5	3717.51	-5	5224.98
-7	3698.41	-7	4580.52
-9	3679.31	-9	3936.06
-11	3662.94	-11	3438.39
-13	3649.3	-13	3087.51
-15	3635.66	-15	2736.63
-17	3596.92	-17	2481.25
-19.5	3548.49	-19.5	2162.03
-22.5	3449.44	-22.5	1904.46
-25.5	3354.76	-25.5	1573.2
-29	3317.52	-29	610.41
-33	3141.54	-33	219.01
-37.5	2984.92	-37.5	111.18
-42.5	2724.35	-42.5	72.85
-47.5	3246.85	-47.5	48.43
-55	2177.98	-55	28.24
-65	1512.52	-65	9.96
-75	610.08	-75	3.27
-85	10.23	-85	.82
-90	4.92	-90	.55

AXIAL CANDELA DISPLAY

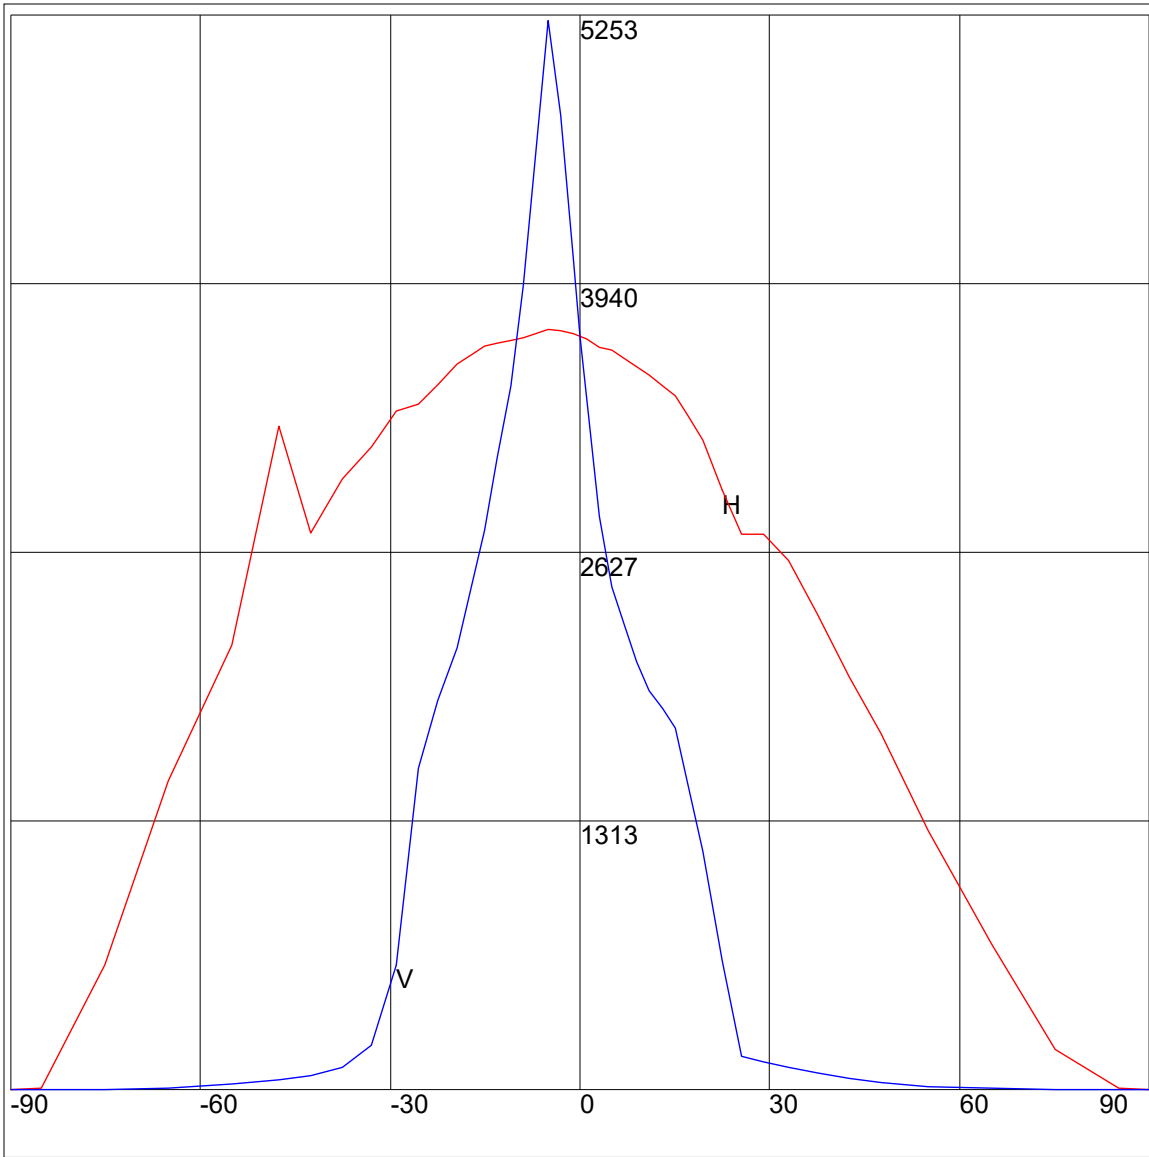

Maximum Candela = 5253.4 Located At Horizontal Angle = -1, Vertical Angle = -5
H - Horizontal Axial Candela
V - Vertical Axial Candela

ISOCANDELA CURVES

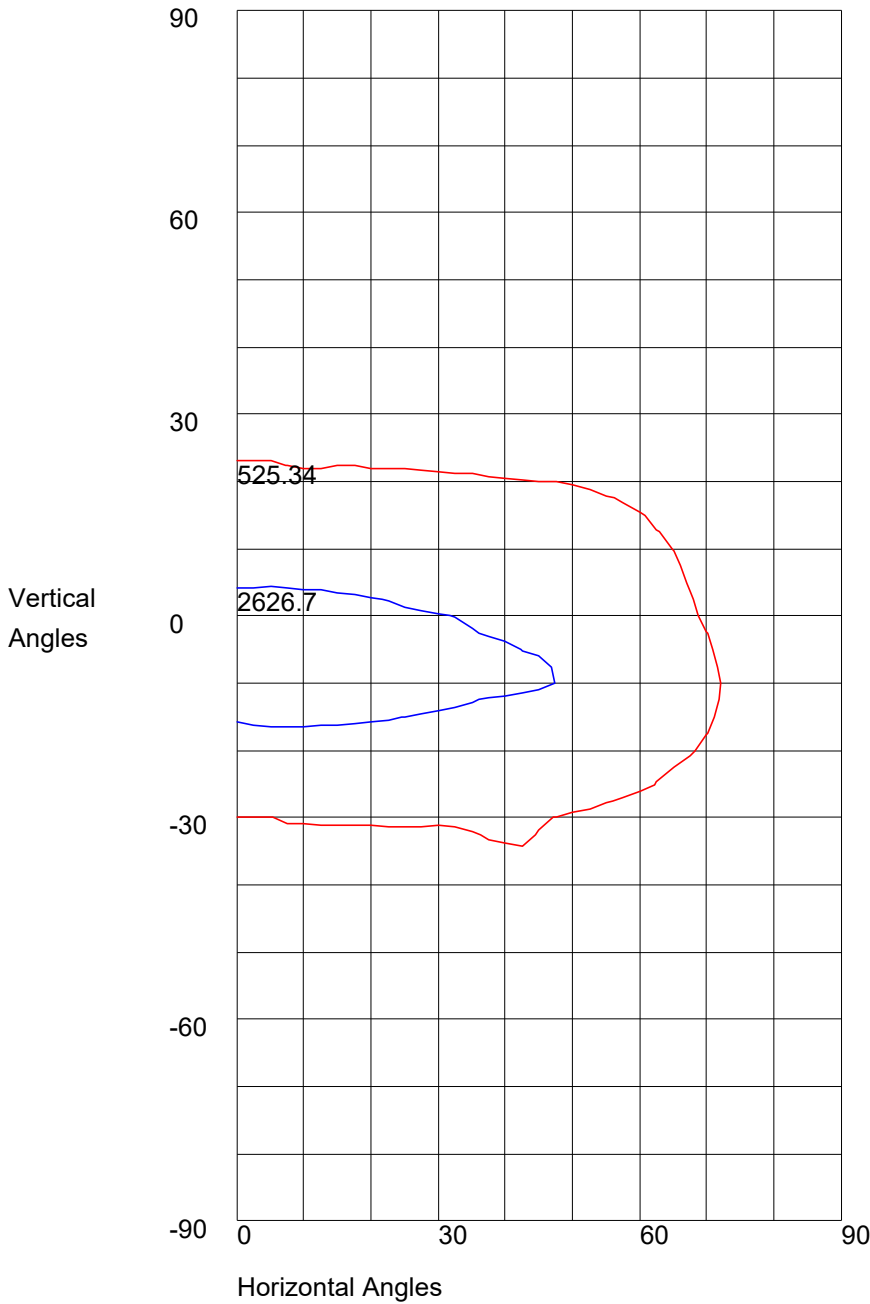

Maximum Candela = 5253.4 Located At Horizontal Angle =-1, Vertical Angle =-5
50% Maximum Candela = 2626.7
10% Maximum Candela = 525.34