



8165 E Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Report No: L072310302



Report No: L072310302
Report Prepared For: USTE dba Vista Professional Outdoor Lighting
1625 Surveyor Ave., Simi Valley CA 93063
Model Number: 1054-X-VF-30-B-MV-ND
Test: Photometric/Colorimetric/Electrical Test

Issue Date: 7/21/2023
Reference: N/A
Amendment: N/A

Standards Used: Appropriate part or all test guidelines were used for test performed:
IESNA LM79: 2019 Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products
ANSI NEMA ANSLG C78.377: 2017 Specification of the Chromaticity of Solid State Lighting Products
ANSI C82.77-10:2014: Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

Description of Sample: Client submitted the sample. Received in working and undamaged condition. No modifications were necessary.

Special Test Condition: Fixture is tested with no special conditions.

Date of Tests: 7/20/23

Seasoning of Sample: No seasoning was performed in accordance with IESNA LM-79.

Equipment List

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Yokogawa Digital Power Meter	WT210	MT-EL06-S4	4/7/25
HP Power Supply	6032A	PS-DC05-S2	--
Fluke Digital Thermometer	52K/J	MT-TP05	5/24/25
LLI Type C Goniophotometer System	RMG-C-MKII	CD-LL04-GC	--
LLI 2M Sphere	2MR97	CD-SN03-S2	--
LLI Spectroradiometer	SPR-3000	MT-SC01-S2	Before Use

General Information

Manufacturer:	USTE dba Vista Professional Outdoor Lighting
Model Number:	1054-X-VF-30-B-MV-ND
Driver Model Number:	UNABLE TO HAVE ACCESS TO DRIVER

Test Summary

Total Lumens:	8191.00
Efficacy:	113.64
Color Redering Index:	82.1
Correlated Color Temperature:	3076
Input Voltage (VAC/60Hz):	120.00
Input Current (Amp):	0.6098
Input Power (W):	72.08
Input Power Factor:	0.9849
Current ATHD (%):	11.6%

Test Condition

Ambient Temperature (°C):	25.0
Stabilization Time (Hours):	0:35
Total Operating Time (Hours):	1:15


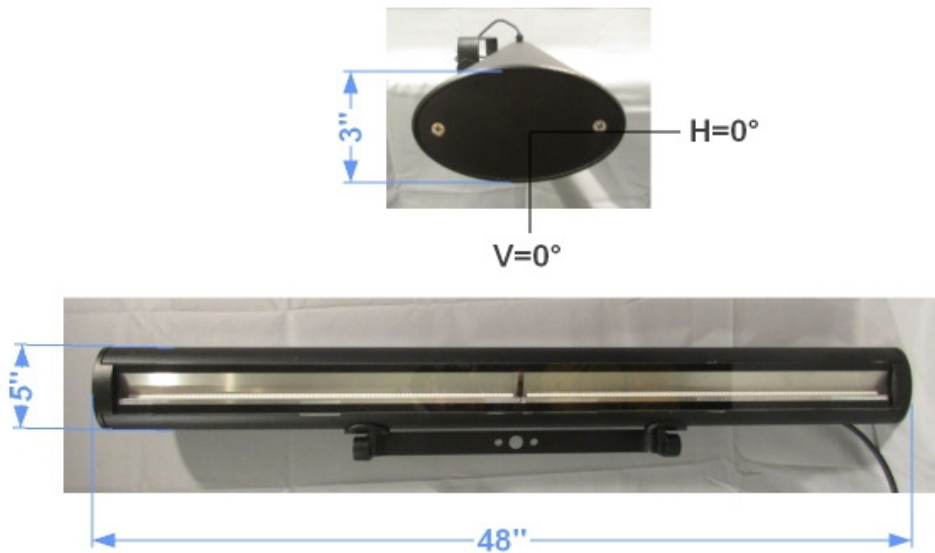


FIG. 1 LUMINAIRE

Colorimetry Test Results

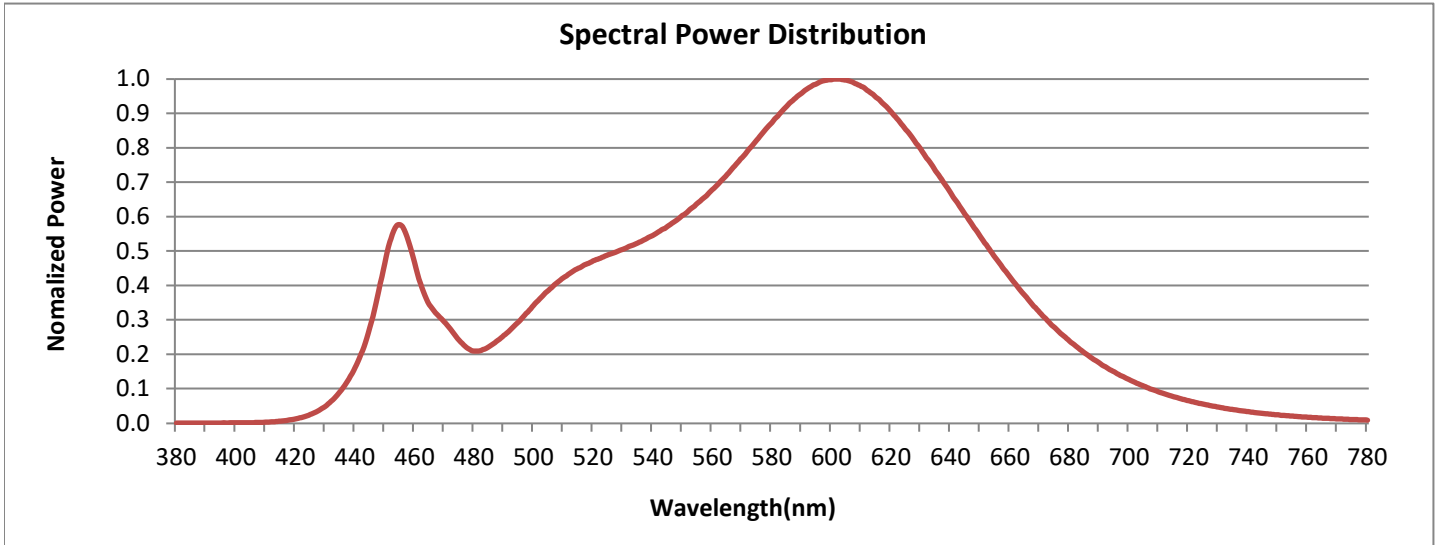


CRI & CCT

x	0.4327
y	0.4046
u'	0.2476
v'	0.5210
CRI	82.10
CCT	3076
Duv	0.00081

R Values

R1	80.57
R2	91.66
R3	95.04
R4	79.89
R5	81.39
R6	90.74
R7	81.28
R8	56.57
R9	2.50
R10	81.52
R11	79.63
R12	70.43
R13	83.34
R14	97.88
R15	72.23

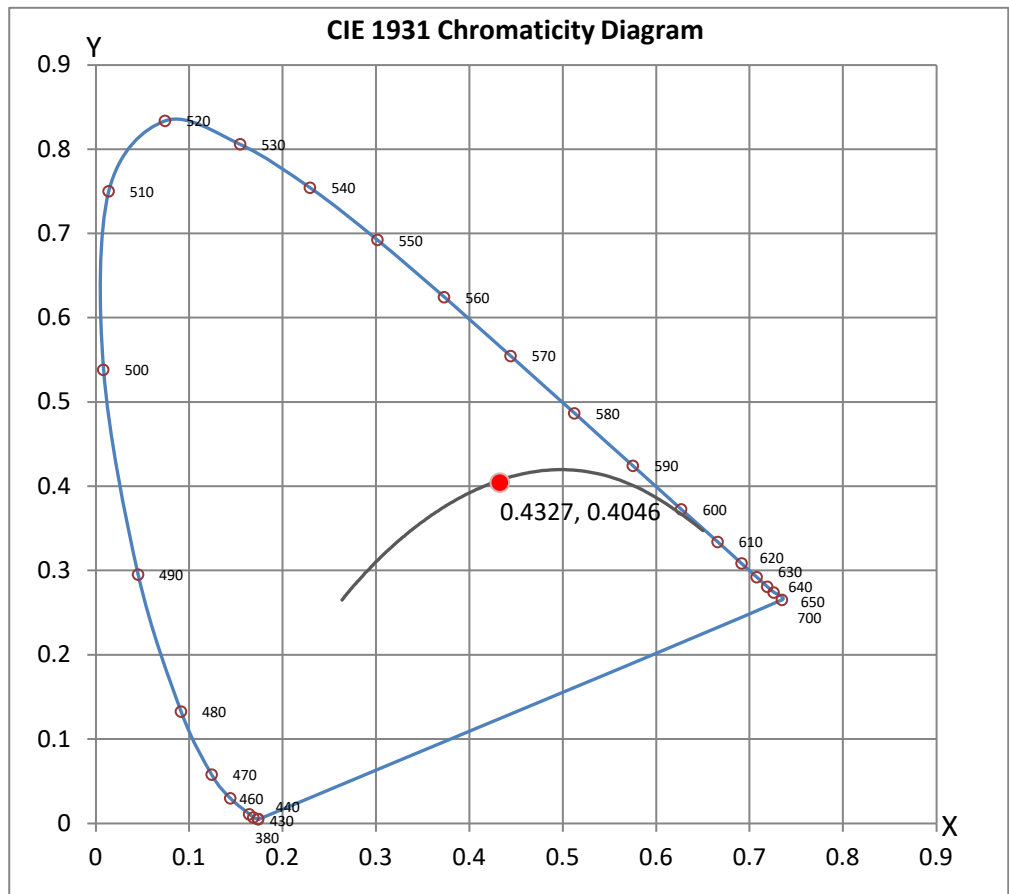



8165 E. Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Photometric Test Report

IES FLOOD REPORT
PHOTOMETRIC FILENAME : L072310302.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L072310302
[TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)
[ISSUEDATE] 7/20/2023
[MANUFAC] USTE dba Vista Professional Outdoor Lighting
[LUMCAT] 1054-X-VF-30-B-MV-ND
[LUMINAIRE] LED LINEAR FLOODLIGHT-VERTICAL FLOOD
[BALLASTCAT] UNABLE TO HAVE ACCESS TO DRIVER
[OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND
[MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
[INPUT] 120VAC
[TEST PROCEDURE] IESNA:LM-79-19

Note: Candela values converted from Type-C to Type-B

CHARACTERISTICS


NEMA Type	7 H x 5 V
Maximum Candela	4395
Maximum Candela Angle	-3H 42.5V
Horizontal Beam Angle (50%)	106.9
Vertical Beam Angle (50%)	76.7
Horizontal Field Angle (10%)	149.6
Vertical Field Angle (10%)	89.9
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	6613
Beam Efficiency	N.A.
Field Lumens	7909
Field Efficiency	N.A.
Spill Lumens	282
Luminaire Lumens	8191
Total Efficiency	N.A.
Total Luminaire Watts	72.08
Ballast Factor	1.00

IES FLOOD REPORT
PHOTOMETRIC FILENAME : L072310302.IES

AXIAL CANDELA


DEG.	HOR.	DEG.	VERT.
90	0	90	0
85	44	85	9
75	433	75	44
65	1046	65	2519
55	1657	55	3937
47.5	2024	47.5	4320
42.5	2259	42.5	4390
37.5	2438	37.5	4352
33	2613	33	4287
29	2724	29	4257
25.5	2777	25.5	4253
22.5	2879	22.5	4232
19.5	2954	19.5	4203
17	2993	17	4166
15	3023	15	4123
13	3046	13	4057
11	3072	11	3952
9	3092	9	3826
7	3106	7	3688
5	3123	5	3535
3	3133	3	3403
1	3153	1	3247
0	3165	0	3165
-1	3153	-1	3063
-3	3133	-3	2890
-5	3123	-5	2806
-7	3106	-7	2692
-9	3092	-9	2515
-11	3072	-11	2085
-13	3046	-13	1397
-15	3023	-15	629
-17	2993	-17	374
-19.5	2954	-19.5	290
-22.5	2879	-22.5	265
-25.5	2777	-25.5	240
-29	2724	-29	205
-33	2613	-33	166
-37.5	2438	-37.5	123
-42.5	2259	-42.5	86
-47.5	2024	-47.5	61
-55	1657	-55	38
-65	1046	-65	22
-75	433	-75	19
-85	44	-85	17
-90	0	-90	0

AXIAL CANDELA DISPLAY

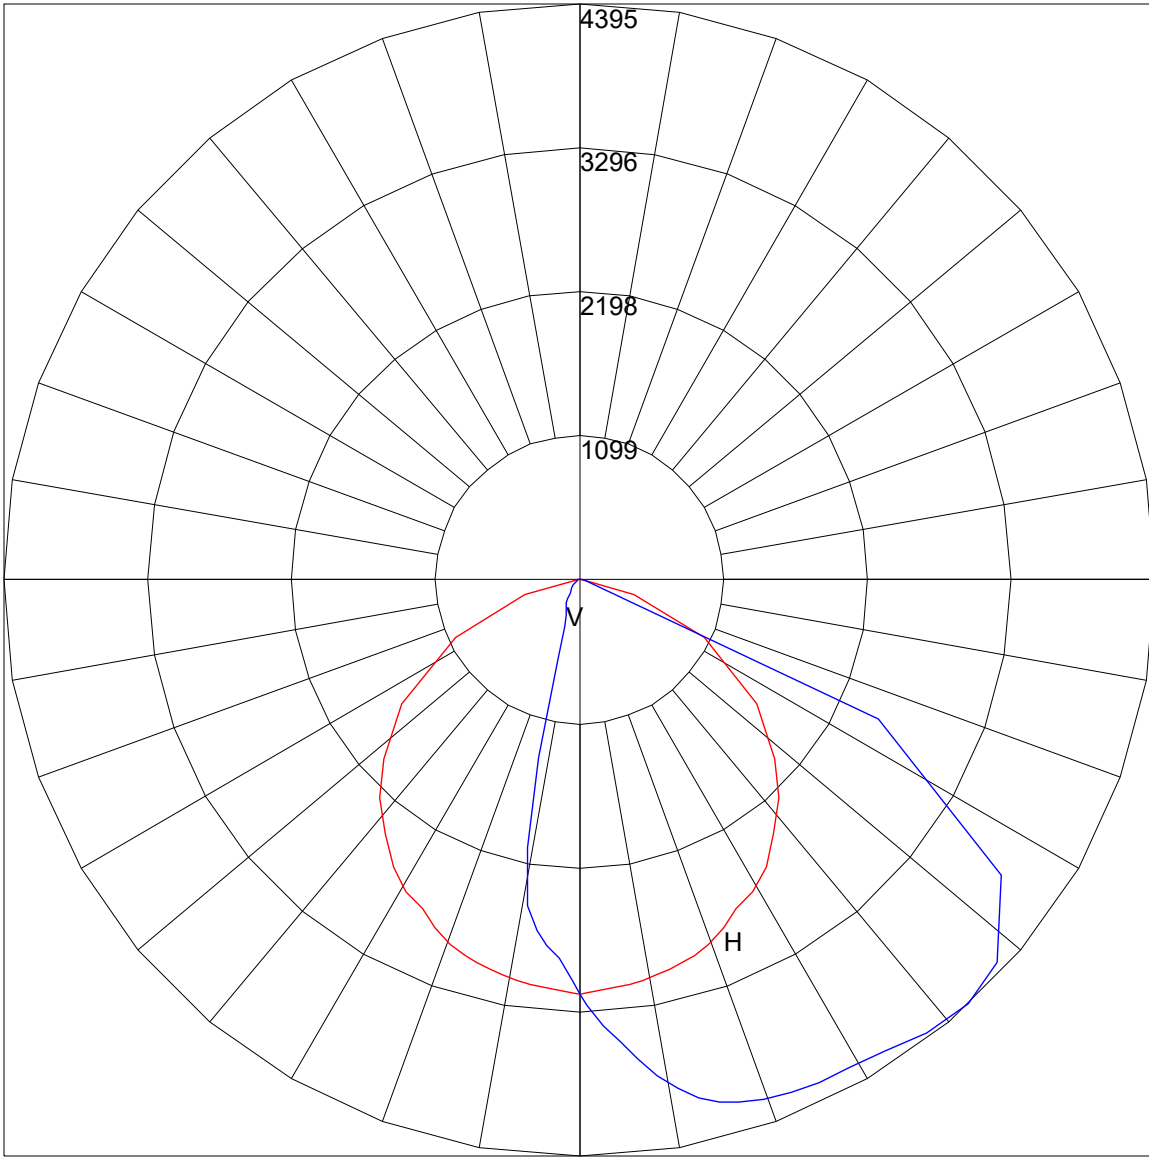

Maximum Candela = 4395 Located At Horizontal Angle =-3, Vertical Angle = 42.5
H - Horizontal Axial Candela
V - Vertical Axial Candela

ISOCANDELA CURVES

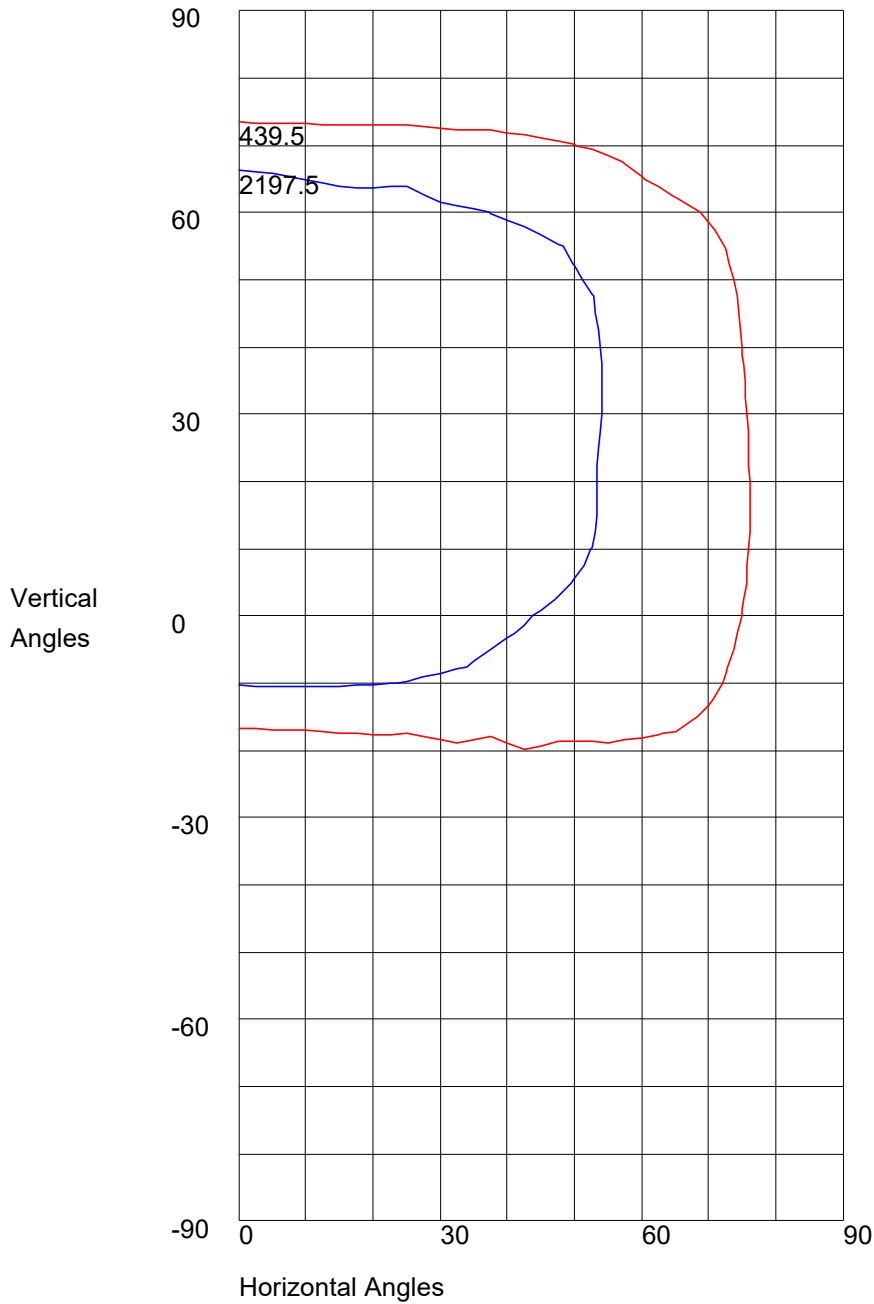

Maximum Candela = 4395 Located At Horizontal Angle = -3, Vertical Angle = 42.5
50% Maximum Candela = 2197.5
10% Maximum Candela = 439.5