

INSTALLATION INSTRUCTIONS

WARNING: Junction boxes must be installed in accordance with the National Electrical Code (NEC) and local codes. Failure to do so will void the warranty and may result in serious injury and/or damage to the luminaire.

NOTE: Always use UL Listed wire connectors for connections.

NOTE: Save these instructions for future reference.





JUNCTION BOX INSTALLATION:

1. Dig hole approximately 10" diameter to a depth suitable to make top of fixture flush to 1/8" above grade. Pea gravel or sand is recommended for seating the housing to aid positioning.
2. Install conduit through 1/2" NPT openings on bottom of junction box using Teflon tape or other thread sealant. Using plug (provided), seal unused conduit entry if required.

NOTE: UL listed flexible conduit is recommended for in and out connections to ease fixture position and adjustment during installation.

3. Thread the luminaire to the Junction Box cover hub.
4. If desired, tighten the locking screw located on underside of Junction Box cover.
5. Support Junction Box housing in selected position using standard masonry procedures.
6. Pull supply wires (line in), through conduit into wire compartment.
7. Wire fixture as required using silicone filled safety connectors.
8. Replace silicone rubber gasket and cover, and tighten screws evenly.

NOTE: Failure to remove all dirt and debris from gasket sealing surface may cause leakage and void the warranty.

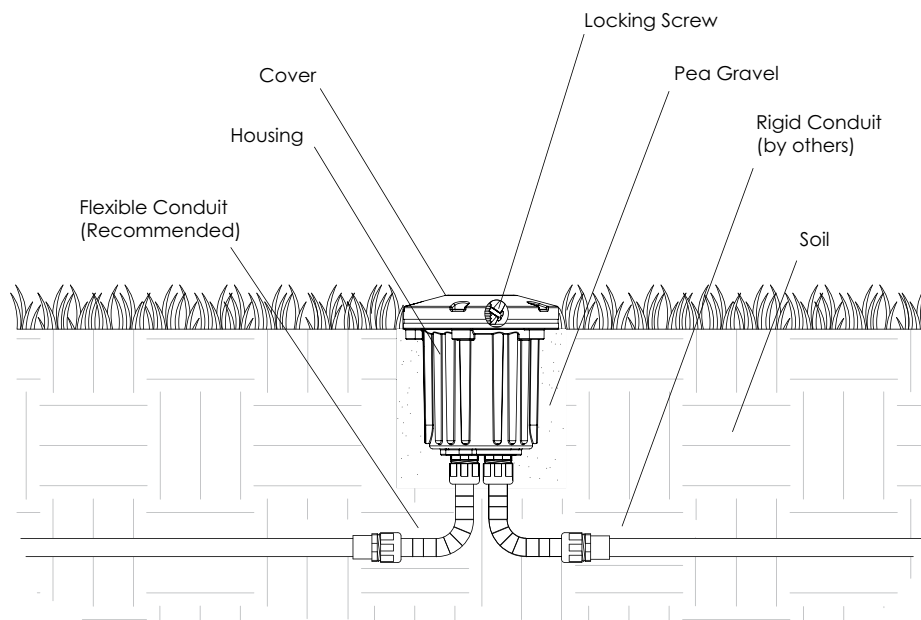

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.