



8165 E. Kaiser Blvd. Anaheim, CA 92808
 www.lightlaboratory.com

Photometric Test Report

IES FLOOD REPORT
PHOTOMETRIC FILENAME : L092110507.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] L092110507
 [TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)
 [ISSUEDATE] 9/23/21
 [MANUFAC] USTE dba Vista Professional Outdoor Lighting
 [LUMCAT] 1051-X-WG-30-A-MV-ND
 [LUMINAIRE] LED LINEAR FLOODLIGHT-WALL GRAZER
 [BALLASTCAT] ERP ESS015W-1000-12
 [_TOTALLUMINAIRELUMENS] 1285.8
 [INPUT] 120VAC
 [TEST PROCEDURE] IESNA:LM-79-08
 [OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND SHOULD NOT BE FACTORED FOR DIFFERENT LAMP P

Note: Candela values converted from Type-C to Type-B

CHARACTERISTICS


NEMA Type	7 H x 4 V
Maximum Candela	2102
Maximum Candela Angle	0H -5V
Horizontal Beam Angle (50%)	94.8
Vertical Beam Angle (50%)	16.7
Horizontal Field Angle (10%)	139.8
Vertical Field Angle (10%)	52.0
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	470
Beam Efficiency	N.A.
Field Lumens	1195
Field Efficiency	N.A.
Spill Lumens	91
Luminaire Lumens	1286
Total Efficiency	N.A.
Total Luminaire Watts	13.35
Ballast Factor	1.00

IES FLOOD REPORT
PHOTOMETRIC FILENAME : L092110507.IES

AXIAL CANDELA


DEG.	HOR.	DEG.	VERT.
90	1.91	90	.27
85	1.91	85	.27
75	56.34	75	.95
65	208.86	65	2.32
55	419.77	55	5.05
47.5	579.66	47.5	11.73
42.5	668.47	42.5	19.24
37.5	763.28	37.5	27.42
33	864.62	33	34.73
29	938.1	29	40.82
25.5	1011.34	25.5	48.07
22.5	1046.91	22.5	212.62
19.5	1076.94	19.5	401.84
17	1101.56	17	530.41
15	1121.26	15	633.27
13	1154.55	13	653.96
11	1187.83	11	674.64
9	1209.05	9	716.96
7	1218.22	7	780.91
5	1227.39	5	844.86
3	1237.6	3	966.88
1	1258.06	1	1160.96
0	1270	0	1270
-1	1267.64	-1	1473.12
-3	1264.8	-3	1842.63
-5	1267.64	-5	2102
-7	1267.81	-7	1840.83
-9	1267.97	-9	1579.66
-11	1257.57	-11	1362.15
-13	1236.62	-13	1188.3
-15	1215.66	-15	1014.44
-17	1195.42	-17	909.34
-19.5	1170.11	-19.5	777.97
-22.5	1153.32	-22.5	683.21
-25.5	1137.75	-25.5	566.21
-29	1110.92	-29	226.62
-33	1041.37	-33	80.24
-37.5	944.59	-37.5	37.93
-42.5	885.79	-42.5	25.51
-47.5	811.58	-47.5	16.23
-55	642.28	-55	10.37
-65	403.4	-65	4.09
-75	132.88	-75	1.36
-85	2.05	-85	.41
-90	1.64	-90	.27

AXIAL CANDELA DISPLAY

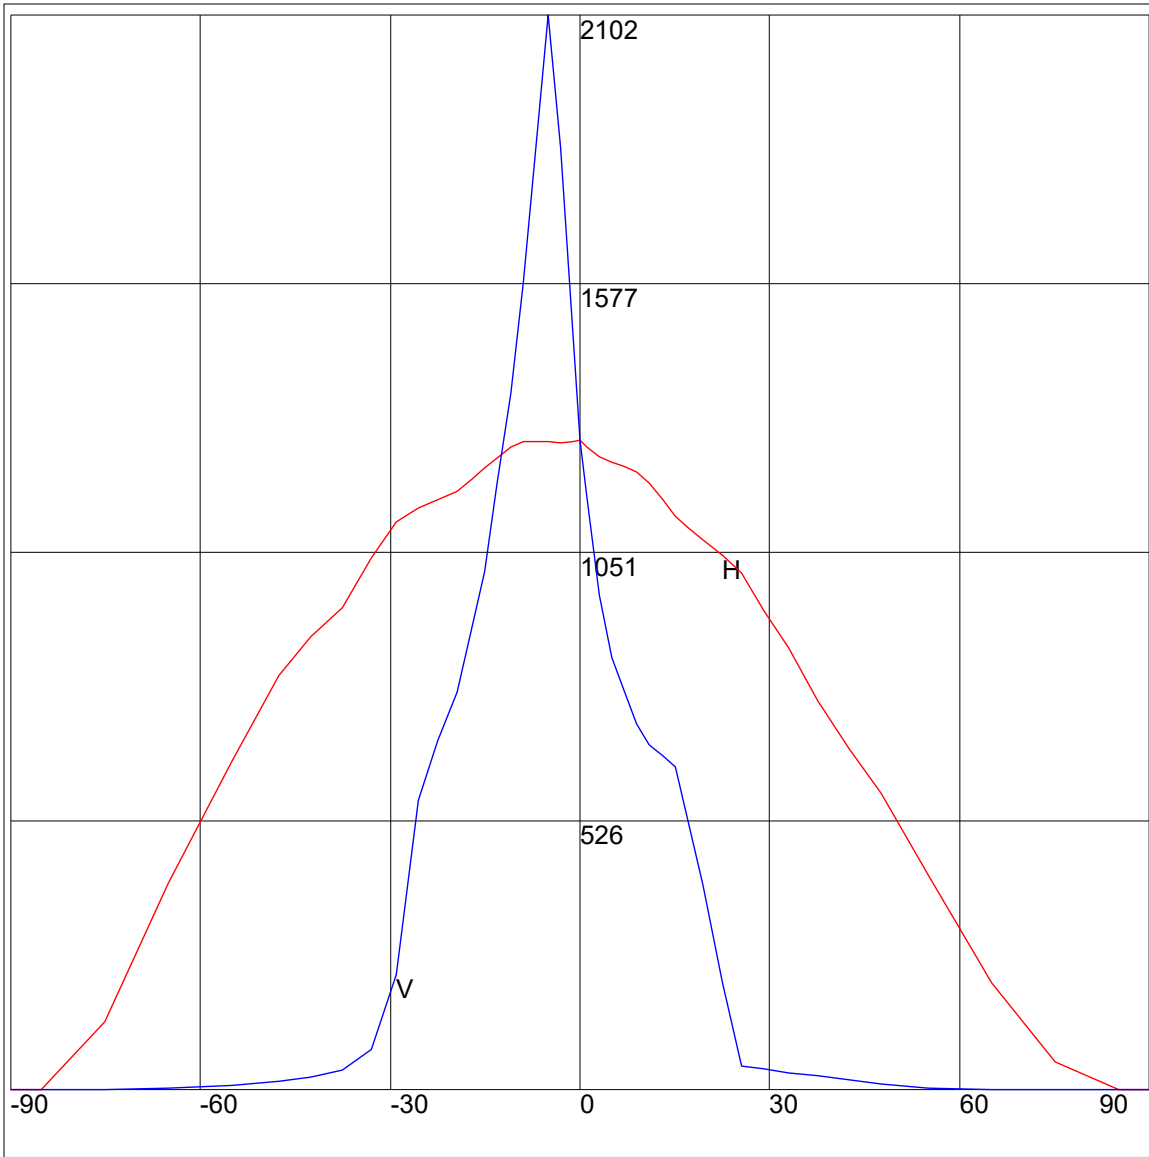

Maximum Candela = 2102 Located At Horizontal Angle = 0, Vertical Angle = -5
H - Horizontal Axial Candela
V - Vertical Axial Candela

ISOCANDELA CURVES

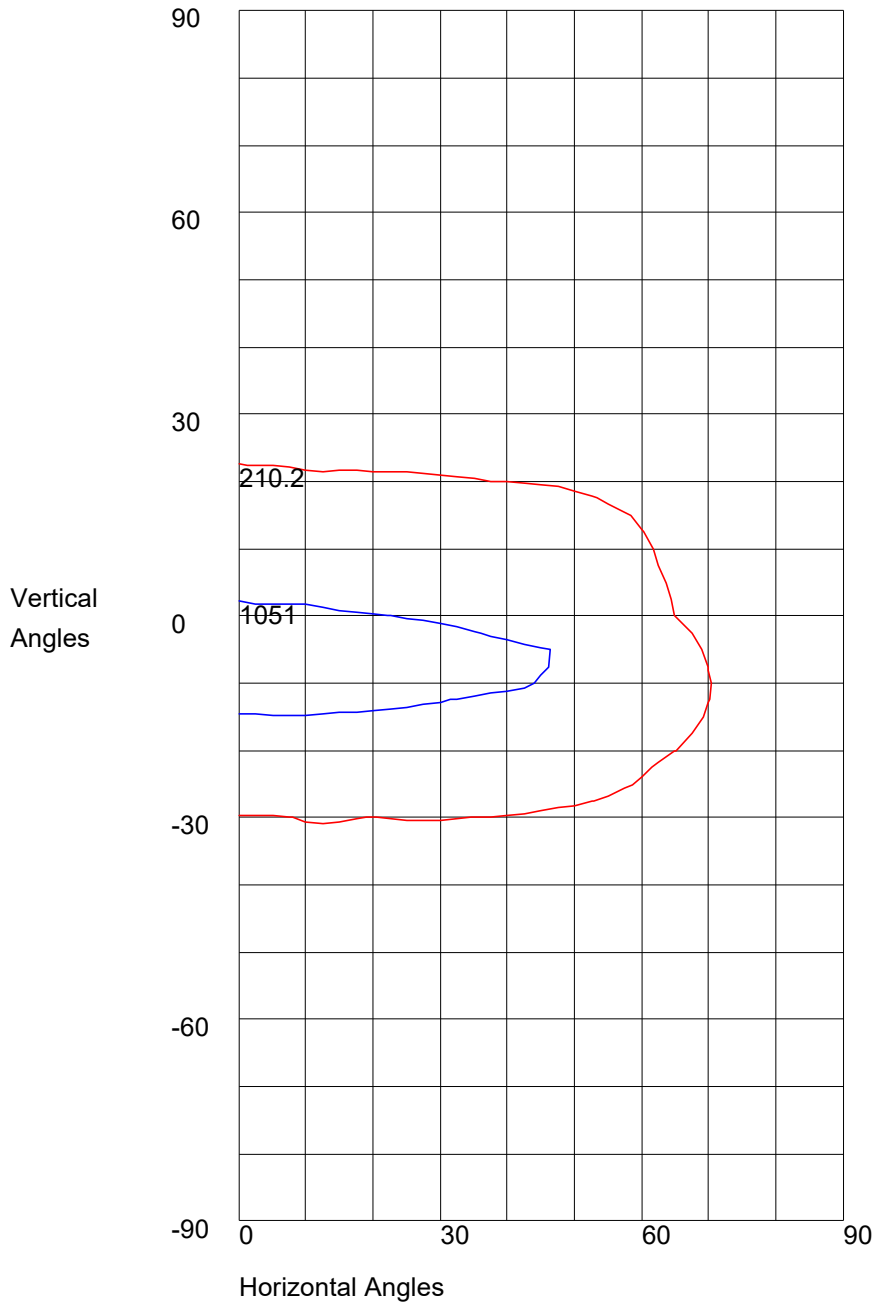

Maximum Candela = 2102 Located At Horizontal Angle = 0, Vertical Angle = -5
50% Maximum Candela = 1051
10% Maximum Candela = 210.2