



**MODEL 1057** | Specification Sheet  
Commercial Series • Floodlight • LED

TYPE:  MODEL:   
PROJECT:

**PRODUCT FEATURES**



Wattage	20 – 57 W
Voltage	120 – 277 VAC
Lumens	1613 – 5778 Delivered Lumens
Distribution	NEMA type [H x V]: 2x2 (VNS), 2x2 (NS), 4x4 (MF), 6x6 (WF)
CCT	2700K, 3000K, 3500K, 4000K, 5000K
CRI	80 CRI min.
Dimming	0-10V or Phase Cut (TRIAC/ELV-120VAC only) available
Driver	Multi-Volt 120-277VAC with tri-modal dimming capabilities
Dimensions	8 <sup>5</sup> / <sub>8</sub> " W x 10 <sup>15</sup> / <sub>32</sub> " D x 7" DIA

**ORDERING INFORMATION**

EXAMPLE: 1057-GM-MF-27-D-MV-PCT-FS

**MODEL FINISH DISTRIBUTION COLOR TEMP LUMENS VOLTAGE DIMMING ACCESSORIES**  
1057 MV

MODEL	FINISH	DISTRIBUTION	COLOR TEMP	DELIVERED LUMENS	VOLTAGE	DIMMING	ACCESSORIES
1057	<b>B</b> Black	<b>VNS</b> Very Narrow Spot	<b>27</b> 2700K	<b>A</b> 1685 Lumens	<b>MV</b> Multi Volt	<b>ND</b> Non Dimming <b>010</b> 0-10V <b>PCT</b> Phase Cut	<b>BD</b> Barn Doors <b>FS</b> Full Light Shield <b>HS</b> Half Light Shield <b>DF</b> Diffuse Filter
	<b>Z</b> Architectural Bronze		<b>50</b> 5000K				
	<b>DZ</b> Dark Bronze						
	<b>GT</b> Granite						
	<b>W</b> White		<b>30</b> 3000K	<b>A</b> 1685 Lumens			
	<b>BR</b> Architectural Brick		<b>35</b> 3500K	<b>B</b> 2396 Lumens			
	<b>LZ</b> Light Bronze	<b>40</b> 4000K	<b>C</b> 2720 Lumens				
	<b>SB</b> Special Bronze	<b>NS</b> Narrow Spot	<b>27</b> 2700K	<b>A</b> 1603-1835 Lumens	<b>LSFH</b> Linear Spread Filter Horizontal <b>LSFV</b> Linear Spread Filter Vertical		
	<b>GG</b> Glossy Gray		<b>50</b> 5000K	<b>B</b> 2214-2589 Lumens			
	<b>R</b> Rust		<b>C</b> 2748-2825 Lumens				
	<b>HG</b> Hunter Green	<b>MF</b> Medium Flood	<b>30</b> 3000K	<b>A</b> 1603-1835 Lumens	<b>D</b> 3892-4218 Lumens		
	<b>WB</b> Weathered Bronze			<b>B</b> 2214-2589 Lumens			
	<b>WI</b> Weathered Iron			<b>C</b> 2748-2825 Lumens			
	<b>GM</b> Graphite Metallic			<b>E</b> 4241-4597 Lumens			
	<b>G</b> Verde	<b>WF</b> Wide Flood	<b>35</b> 3500K	<b>A</b> 1603-1835 Lumens	<b>F</b> 4796-5778 Lumens		
	<b>P</b> Pewter			<b>B</b> 2214-2589 Lumens			
<b>M</b> Mocha	<b>C</b> 2748-2825 Lumens						
<b>OF</b> Olde Finish	<b>E</b> 4241-4597 Lumens						



PROFESSIONAL  
OUTDOOR LIGHTING

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)  
1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



**SPECIFICATIONS**

**HOUSING:**

Die-cast A360 aluminum. Optic and driver compartment environmentally sealed. Housing aiming achieved via a heavy aluminum yoke strap and locked in position with stainless steel lock washers and nuts. Locking fasteners are covered with decorative die-cast aluminum end caps.

**DOOR:**

Die-cast A360 aluminum. Stainless steel fasteners. Door is designed to shed water from the lens surface.

**FINISH:**

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request.

**LENS:**

3/8" thick tempered and beveled clear glass.

**REFLECTOR:**

Specular, semi-specular, or White Optic coated spun reflectors, anodized for maximum performance. Very Narrow Spot optic incorporates an additional internal source shield to eliminate unwanted glare outside the beam pattern.

**LED:**

Performance COB LEDs powered from 450mA-1400mA.  
1613 – 5778 Lumens delivered.  
20 – 57 Watts.

**COLOR TEMPERATURE:**

2700K, 3000K, 3500K, 4000K or 5000K CCT White.

**COLOR RENDERING:**

80 CRI minimum

**OPTICS/AIMING:**

**ACCESSORIES:**

Barn Doors, Full Shield, Half Shield, Diffuse Filter and Linear Spread Filter available.

**WIRING:**

- 18/3 SEOWW outdoor rated waterproof cable [for Non-dimmable and Phase Cut (TRIAC/ELV-120VAC only) options]
- 18/5 SJTOW outdoor rated waterproof cable [for 0-10V dimming option]

Cable exits fixture housing through a liquid tight cable fitting.

**MOUNTING:**

Yoke provided with 1/2 NPSM stainless Cord Seal Mount to secure the yoke strap directly into a 1/2-14 NPT threaded opening. See the Vista website for additional Mounts and Accessories.

**CERTIFICATION:**

cULus wet location listed.  
Ingress Protection Rating: IP66

NEMA defined floodlight optics.

Housing aiming achieved via an aluminum yoke strap.


**DRIVER:**

Multi-Volt **MV** 120V-277V equipped with tri-modal dimming capabilities. Start up/Operating Temperature: -10°C to +50°C. Non-dimmable, 0-10V and Phase Cut (TRIAC/ELV-120VAC only) options available.

**LIGHT DISTRIBUTION:**

Very Narrow Spot **VNS** (NEMA 2H x 2v), Narrow Spot **NS** (NEMA 2H x 2v), Medium Flood **MF** (NEMA 5H x 5v), Wide Flood **WF** (NEMA 6H x 6v)

**DIMENSIONS**

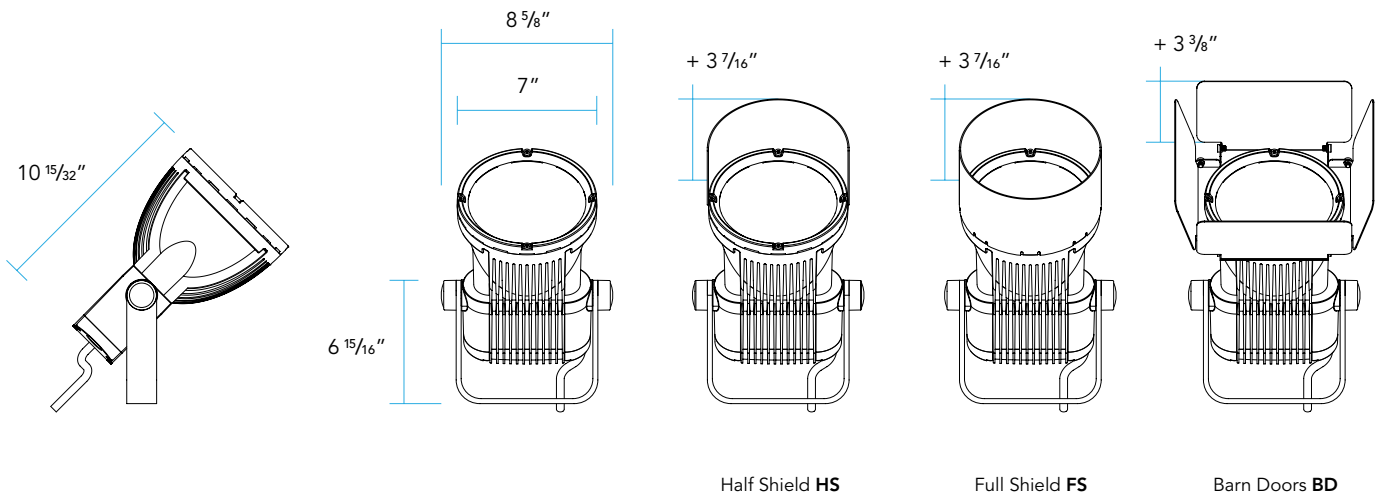



**DELIVERED LUMENS**

LUMEN PACKAGE	VNS	NS	MF	WF
<b>A</b>	38 Watts 1685 Lumens	18 Watts 1835 Lumens	18 Watts 1603 Lumens	18 Watts 1613 Lumens
<b>B</b>	47 Watts 2396 Lumens	28 Watts 2589 Lumens	28 Watts 2214 Lumens	28 Watts 2263 Lumens
<b>C</b>	57 Watts 2720 Lumens	43 Watts 2825 Lumens	38 Watts 2748 Lumens	38 Watts 2775 Lumens
<b>D</b>		42 Watts 4218 Lumens	42 Watts 3892 Lumens	42 Watts 3928 Lumens
<b>E</b>		47 Watts 4597 Lumens	47 Watts 4241 Lumens	47 Watts 4260 Lumens
<b>F</b>		57 Watts 5778 Lumens	57 Watts 4796 Lumens	56 Watts 4819 Lumens

