

SPECIFICATION SHEET

MODEL: 1073 120V SERIES: Up & Accent Lights

SPECIFICATIONS:

HOUSING:

Die-cast, copper free aluminum.

SHROUD:

Available with medium shroud (M) or without shroud (N). Medium shroud integrally molded with housing and aimable 359° about knuckle base.

FINISH:

Polyester powder-coat finish available in Black, Verde, Architectural Brick, Architectural Bronze, Light Bronze, Dark Bronze, Granite, Pewter, Terra-cotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron, and White.

LENS:

Clear soda lime glass.

LAMP TYPE:

Three (3) White High Output LED emitters, with Vista exclusive driver, powered to operate for 50,000 hours. Available in Warm (W) or Cool (C) color temperatures.

OPTICS:

Injection-molded optical grade acrylic available in Spot (SP), Flood (FL), and Wide Flood (WF) distributions.

ELECTRICAL:

120V or 240V 50/60Hz input. UL recognized, high efficiency toroidal

transformer; offering quiet operation, low temperature rise, and low no-load losses. Constant current driver output, producing 4.2 Watts of High Output LED illumination. Consuming 6.5 system watts.

MOUNTING:

Injection-molded, Ryton R4® adjustable knuckle with ½" NPS stem. Fixture may be mounted into threaded hubs in junction boxes and tree mount boxes (See list of accessories under Vista products for ordering code).

FASTENERS:

All fasteners are stainless steel.

WIRING:


Prewired with 200°C rated wire and grounded lead.

CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for low voltage LED landscape luminaires (UL 8750). Also, UL listed for line-voltage lighting fixtures (UL 1598). The maximum wattages allowed by Underwriters Laboratories (UL) for U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about the maximum wattages allowed by UL Canadian standards.

All Vista luminaires are [MADE IN THE U.S.A.](#)

DIMENSIONS:

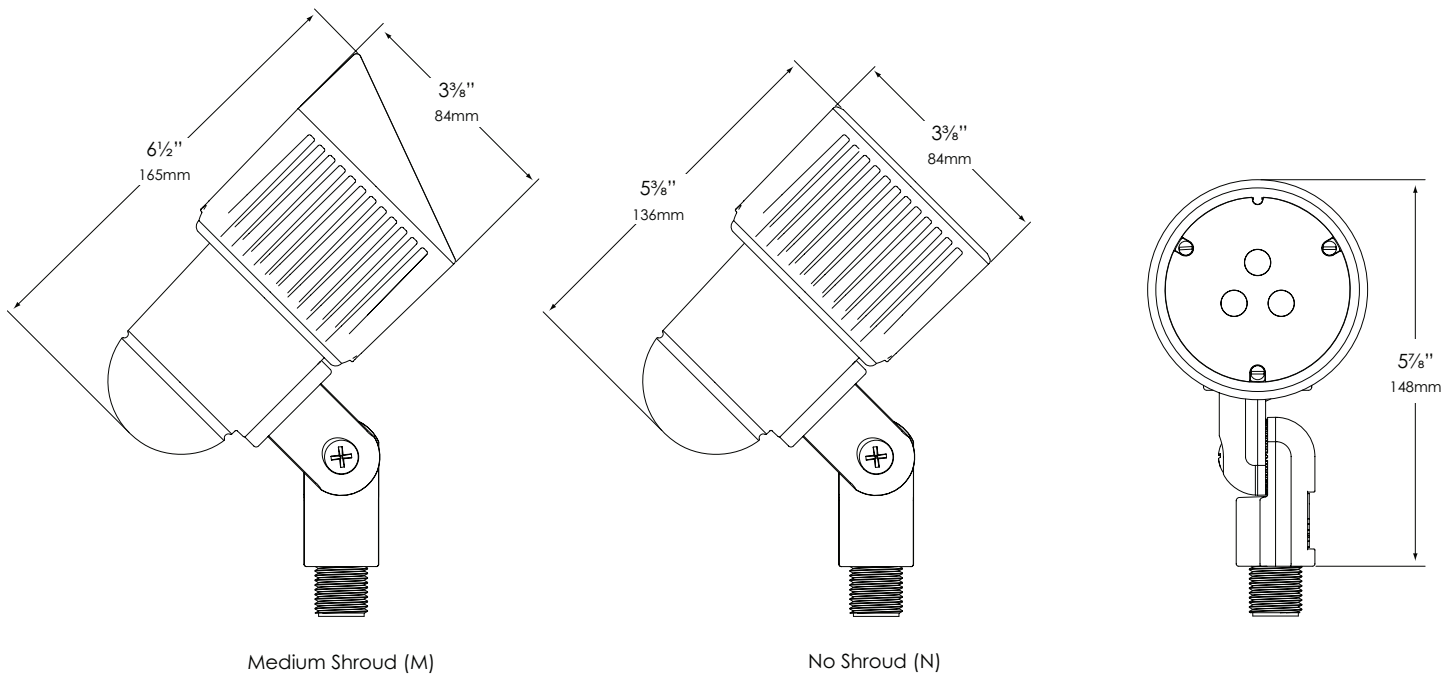

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.

SPECIFICATION SHEET

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example

EXAMPLE: 1073-B-W-SP-M-240

MODEL	FINISH	COLOR TEMP.	DISTRIBUTION	SHROUD	VOLTAGE
1073	B- Black G- Verde BR- Architectural Brick Z- Architectural Bronze LZ- Light Bronze DZ- Dark Bronze GT- Granite P- Pewter TC- Terra-cotta R- Rust HG- Hunter Green M- Mocha WB- Weathered Bronze WI- Weathered Iron W- White	W - Warm C - Cool	SP - Spot FL - Flood WF - Wide Flood	M - Medium N - No Shroud	120 240

Fixtures shipped with standard lamp, unless otherwise specified.