

Type: \_\_\_\_\_  
 Model: \_\_\_\_\_  
 Project: \_\_\_\_\_

**SPECIFICATION SHEET**

**MODEL: 1453 - 120V Series: Bollards & Beacons**

**FIXTURE SPECIFICATIONS:**

**HOUSING:**

Die-cast, copper-free aluminum.

**POST:**

3" diameter, heavy-gauge, extruded aluminum (1/8" wall thickness).

**FINISH:**

Polyester powder-coat finish available in Black, Verde, Architectural Brick, Architectural Bronze, Light Bronze, Dark Bronze, Granite, Pewter, Terra-cotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron, and White.

**SOCKET/LAMP HOLDER:**

Compact fluorescent thermoplastic socket.

**BALLAST:**

High-power factor magnetic ballast rated for ±32°F starting, 120-volt standard.

**LENS:**

Clear, frosted or prismatic threaded and gasketed, tempered glass vapor globe.

**LAMP TYPE:**

PL- Compact Fluorescent. 22W Maximum. Ballast is integrated into fixture. Please specify ballast type from the fixture ordering information chart. Lamp not included with fixture, order separately.

**MOUNTING:**

Direct-burial post. (Post extended 12" for in-ground or concrete mounting.)

**FASTENERS:**

All fasteners are stainless steel.

**WIRING:**


Prewired with 200°C-rated wire along with a grounded lead.

**CERTIFICATION:**

UL Listed to U.S. and Canadian safety standards for line voltage landscape luminaires (UL 1598). The maximum wattages allowed by Underwriters Laboratories (UL) for the U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about the maximum wattages allowed by UL Canadian standards.

All Vista luminaires are **MADE IN THE U.S.A.**

**DIMENSIONS:**

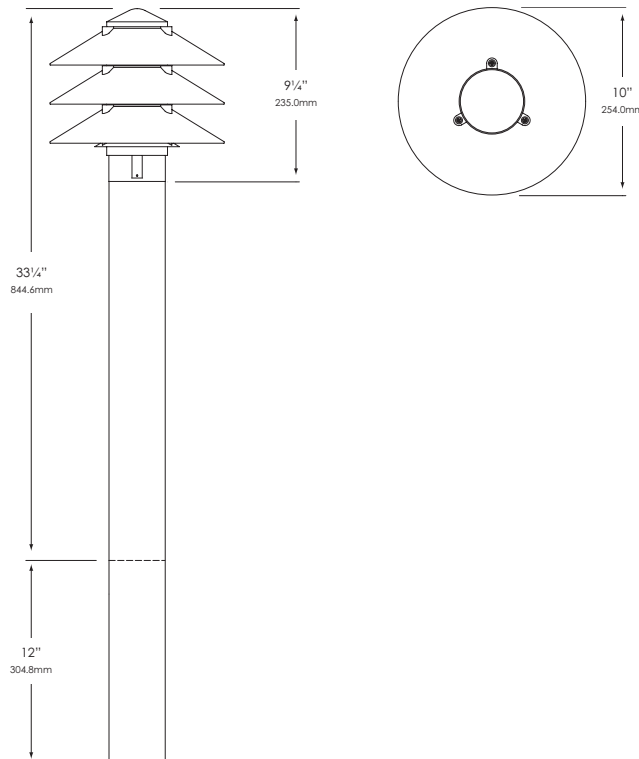

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



# SPECIFICATION SHEET

## MODEL: 1453 - 120V Series: Bollards & Beacons

### FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example

EXAMPLE: 1453-B-CR-13-120

MODEL	FINISH	LENS	INTEGRATED FLUORESCENT BALLAST		
			WATTAGE	VOLTAGE	
1453	<b>B</b> - Black	<b>CR</b> - Clear lens	5	120	
	<b>G</b> - Verde		<b>FR</b> - Frosted lens	7	208
	<b>BR</b> - Architectural Brick		<b>PR</b> - Prismatic lens	9	240
	<b>Z</b> - Architectural Bronze		13*	277	
	<b>LZ</b> - Light Bronze		22*	<b>MT</b> - Multi-tap	
	<b>DZ</b> - Dark Bronze				
	<b>GT</b> - Granite				
	<b>P</b> - Pewter				
	<b>TC</b> - Terra-cotta				
	<b>R</b> - Rust				
	<b>HG</b> - Hunter Green				
	<b>M</b> - Mocha				
	<b>WB</b> - Weathered Bronze				
<b>WI</b> - Weathered Iron					
<b>W</b> - White					

Lamp not included with fixture, order separately. For available lamps, see Lamp Guide, Vista catalog.

\* - Ballast available in 120 or 277 volts only.

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.