

Type: \_\_\_\_\_  
 Model: \_\_\_\_\_  
 Project: \_\_\_\_\_

## SPECIFICATION SHEET

# MODEL: 2521 - 12V Series: Specialty Lights

### FIXTURE SPECIFICATIONS:

**HOUSING:**

Available in: Brushed copper, natural brass, stainless steel or copper-free aluminum.

**FINISH:**

Brushed natural copper (CSN), natural brass (BSN), or stainless steel (SS). Also, polyester powder-coat finish available in Black, Verde, Architectural Brick, Architectural Bronze, Light Bronze, Dark Bronze, Granite, Pewter, Terra-cotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron, and White.

**SOCKET/LAMP HOLDER:**

Top grade Noryl polymer socket with phosphor bronze contacts and PVC-jacketed wire leads.

**LAMP TYPE:**

MR-16 Halogen – 35W maximum. LN-20 BAB (20W) Standard.

*(See back page for LED lamp specifications)*

**MOUNTING:**

Wall mount canopy included.

**FASTENERS:**

All fasteners are stainless steel.

**WIRING:**


Prewired with a three-foot pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

**CERTIFICATION:**

UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838). Maximum wattages allowed by Underwriters Laboratories (UL) for U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about maximum wattages allowed by UL Canadian standards.

All Vista luminaires are **MADE IN U.S.A.**

### DIMENSIONS:

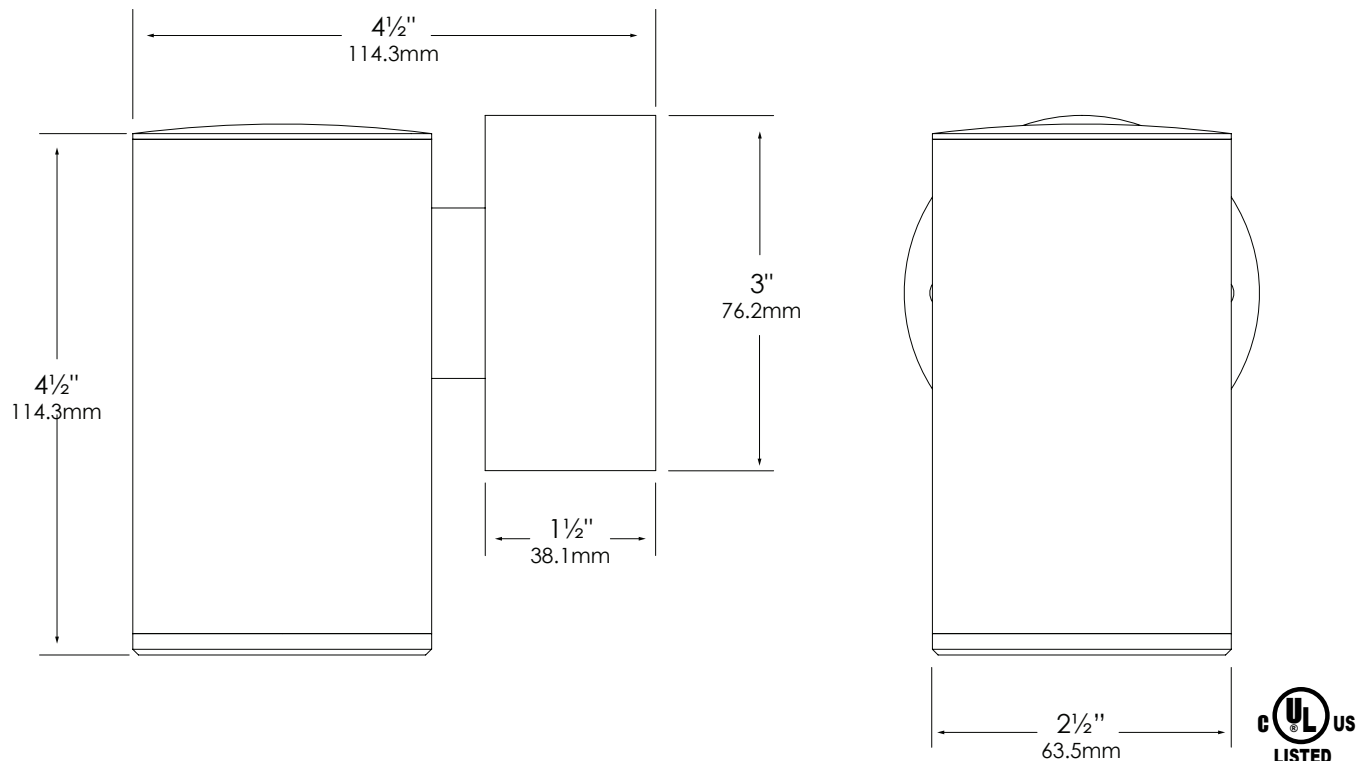

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.

## SPECIFICATION SHEET

### MODEL: 2521 - 12V Series: Specialty Lights

#### FIXTURE ORDERING INFORMATION

**TO ORDER FIXTURE:** Select appropriate choice from each column as in the following example

**EXAMPLE:** WR-2521-CSN-BAB-SL

MOUNTING	MODEL	FINISH	LAMP / LED	ACCESSORIES
<b>WR</b> - Wall mount canopy	2521	<b>CSN</b> - Natural Copper <b>BSN</b> - Natural Brass <b>SS</b> - Stainless Steel  <b>B</b> - Black <b>G</b> - Verde <b>BR</b> - Architectural Brick <b>Z</b> - Architectural Bronze <b>LZ</b> - Light Bronze <b>DZ</b> - Dark Bronze <b>GT</b> - Granite <b>P</b> - Pewter <b>TC</b> - Terra-cotta <b>R</b> - Rust <b>HG</b> - Hunter Green <b>M</b> - Mocha <b>WB</b> - Weathered Bronze <b>WI</b> - Weathered Iron <b>W</b> - White	MR-16 Halogen 35W maximum LN-20 BAB (20W) Standard  LED - Group A Emitter Qty - 3 Distribution - Spot (SP), Flood (FL) or Wide Flood (WF) Temperature - Neutral (N) Operating voltage range - 6 to 15V.  <i>(Please see lamp order code column on lamp guide, Vista product catalog.)</i>	<b>BL</b> - Flat Cool Blue lens <b>SL</b> - Flat Spread lens <b>FR</b> - Flat Frosted lens <b>CX</b> - Crowned Clear lens <b>CFR</b> - Crowned Frosted lens <b>DBL</b> - Flat Dark Blue lens <b>GL</b> - Flat Dark Green lens <b>RL</b> - Flat Red lens <b>YL</b> - Flat Amber lens <b>HL</b> - Honeycomb louver

Fixtures shipped with standard lamp, unless otherwise specified.