

Type: _____
 Model: _____
 Project: _____

SPECIFICATION SHEET

MODEL: 4260 - 12V Series: Step & Brick Lights

FIXTURE SPECIFICATIONS:

CHASSIS:

Stainless Steel

Flange Plate:

Stainless Steel

HOUSING:

Aluminum, Stainless Steel, Brass, or Copper

FINISH:

Polyester powder-coat finish available in Black, Verde, Architectural Brick, Architectural Bronze, Light Bronze, Dark Bronze, Granite, Pewter, Terra-cotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron, and White. Also, natural copper, stainless steel, natural brass, and Olde brass.

SOCKET/LAMP HOLDER:

Top grade Noryl polymer socket with phosphor bronze contacts and PVC-jacketed wire leads.

Stainless steel lamp holder.

LAMP TYPE:

LNX-10 T3.5 Xenon(10W) Standard, 10W Max

(See back page for LED lamp specifications)

LENS:

High-impact, textured, Tuffak® lens for superior light distribution.

WIRING:





Provided with a five-foot pigtail of 18-2 SPT1 UV resistant cable & underground connectors for a secure connection to supply cable.

CERTIFICATION:

Pending

All Vista luminaires are [MADE IN U.S.A.](#)

DIMENSIONS:

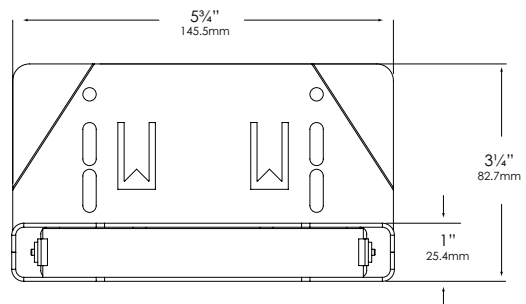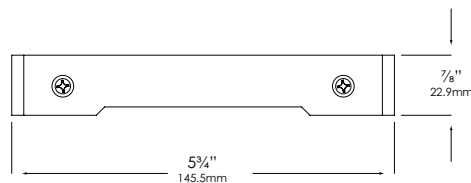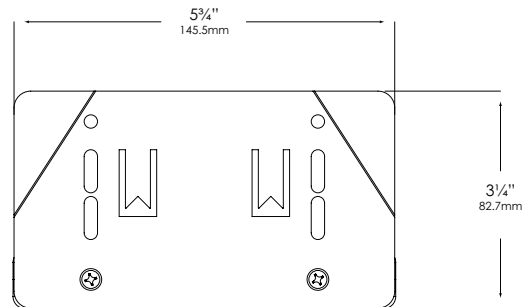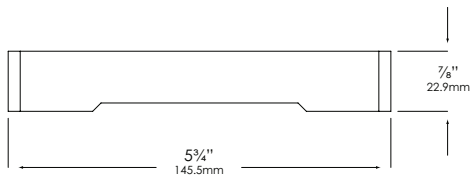

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.

SPECIFICATION SHEET

MODEL: 4260 - 12V Series: Step & Brick Lights

LED LAMP SPECIFICATIONS (if applicable) :

LAMP TYPE:

High Output LED with Vista exclusive smart-driver, powered to operate for 50,000 hours.

ELECTRICAL:

Input voltage range 6-15V AC, regulated to achieve uniform illumination throughout the cable run of fixtures. Integral surge & reverse polarity protection.

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example

EXAMPLE: SL-4260-B-T3 10

MOUNTING	MODEL	FINISH	LAMP
SL- Step light	4260	B - Black G - Verde BR - Architectural Brick Z - Architectural Bronze LZ - Light Bronze DZ - Dark Bronze GT - Granite P - Pewter TC - Terracotta R - Rust HG - Hunter Green M - Mocha WB - Weathered Bronze WI - Weathered Iron W - White SS - Stainless Steel CSN - Copper BSN - Brass BSO - Olde Brass	T3.5 Wedge Base 10W Maximum LNX-10 T3.5 Xenon (10W) Standard LED - Group B Emitter Qty - 1 Temperature - Cool (C), Warm (W) Operating voltage range - 6 to 15V. <i>(Please see lamp order code column on lamp guide, Vista product catalog.)</i>

Fixtures shipped with standard lamp, unless otherwise specified.