

Type: \_\_\_\_\_  
 Model: \_\_\_\_\_  
 Project: \_\_\_\_\_

## SPECIFICATION SHEET

# MODEL: 4261 - 12V Series: Step & Brick Lights

### FIXTURE SPECIFICATIONS:

**CHASSIS:**

Stainless Steel

**Flange Plate:**

Stainless Steel

**HOUSING:**

Aluminum, Stainless Steel, Brass, or Copper

**FINISH:**

Polyester powder-coat finish available in Black, Verde, Architectural Brick, Architectural Bronze, Light Bronze, Dark Bronze, Granite, Pewter, Terra-cotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron, and White. Also, natural copper, stainless steel, natural brass, and Olde brass.

**SOCKET/LAMP HOLDER:**

Top grade Noryl polymer socket with phosphor bronze contacts and PVC-jacketed wire leads.

Stainless steel lamp holder.

**LAMP TYPE:**

LNX-10 T3.5 Xenon(10W) Standard, 20W Max

(See back page for LED lamp specifications)

**LENS:**

High-impact, textured, Tuffak® lens for superior light distribution.

**WIRING:**





Provided with a five-foot pigtail of 18-2 SPT1 UV resistant cable & underground connectors for a secure connection to supply cable.

**CERTIFICATION:**

Pending

All Vista luminaires are [MADE IN U.S.A.](#)

### DIMENSIONS:

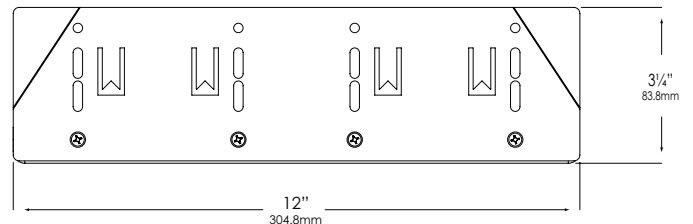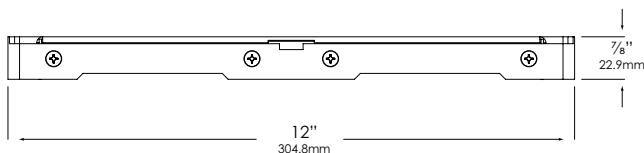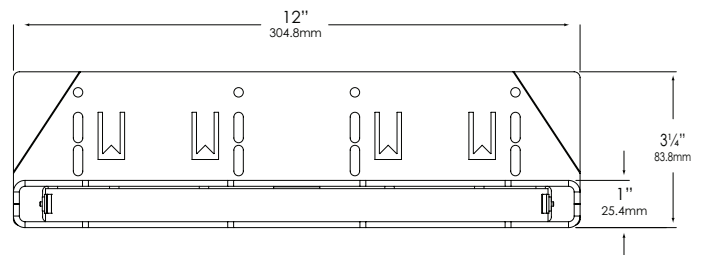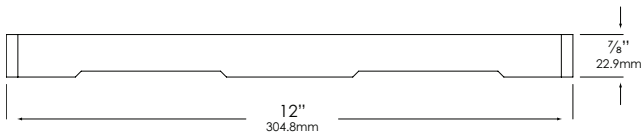

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.

## SPECIFICATION SHEET

### MODEL: 4261 - 12V Series: Step & Brick Lights

#### LED LAMP SPECIFICATIONS (if applicable) :

**LAMP TYPE:**

High Output LED with Vista exclusive smart-driver, powered to operate for 50,000 hours.

**ELECTRICAL:**

Input voltage range 6-15V AC, regulated to achieve uniform illumination throughout the cable run of fixtures. Integral surge & reverse polarity protection.

#### FIXTURE ORDERING INFORMATION

**TO ORDER FIXTURE:** Select appropriate choice from each column as in the following example

**EXAMPLE:** SL-4261-B-T3 10

MOUNTING	MODEL	FINISH	LAMP
SL- Step light	4261	<b>B</b> - Black <b>G</b> - Verde <b>BR</b> - Architectural Brick <b>Z</b> - Architectural Bronze <b>LZ</b> - Light Bronze <b>DZ</b> - Dark Bronze <b>GT</b> - Granite <b>P</b> - Pewter <b>TC</b> - Terra-cotta <b>R</b> - Rust <b>HG</b> - Hunter Green <b>M</b> - Mocha <b>WB</b> - Weathered Bronze <b>WI</b> - Weathered Iron <b>W</b> - White  <b>SS</b> - Stainless Steel <b>CSN</b> - Copper <b>BSN</b> - Brass <b>BSO</b> - Olde Brass	T3.5 Wedge Base 20W Maximum LNX-10 T3.5 Xenon (10W) Standard  LED - Group B Two 1-emitter modules Temperature - Cool (C), Warm (W) Operating voltage range - 6 to 15V.  <i>(Please see lamp order code column on lamp guide, Vista product catalog.)</i>

Fixtures shipped with standard lamp, unless otherwise specified.