

TYPE:	MODEL:
PROJECT:	
	c(UL)us

PRODUCT FEATURES

Wattage	1.5 W
Voltage	9 – 15 VAC
Lamp Туре	G4 LED
Housing	Aluminum
Dimensions	9" DIA x 17 1⁄2" H



ORDERING INFORMATION

EXAMPLE: PR-8204-B-150-W-G4-RS

MOUNTING	MODEL	FINISH	LED	ACCESSORIES
BR	8204			

MOUNTING	MODEL	FINISH	LED	ACCESSORIES
BR Mounting Base with ABS ground stake 8204	8204	B Black	150-W-G4 1.5 Watts Warm G4 LED Lamp	RS 180° Reflector Shield
		Z Architectural Bronze	NL No Lamp	
		DZ Dark Bronze		
		GT Granite		
		W White		
		BR Architectural Brick		
		LZ Light Bronze		
		SB Special Bronze		
		GG Glossy Gray		
		R Rust		
		HG Hunter Green		
		WB Weathered Bronze		
		WI Weathered Iron		
		GM Graphite Metallic		
	G Verde			
	P Pewter			
		M Mocha		
		OF Olde Finish		





Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors.

UL Listed to U.S. and Canadian safety standards for low voltage landscape

FASTENERS:

CERTIFICATION:

luminaires (UL 1838).

WIRING:

All fasteners are stainless steel.

SPECIFICATIONS

HOUSING CONSTRUCTION:

Die-cast A360 aluminum.

POST CONSTRUCTION:

Extruded Aluminum (1/8" wall thickness).

FINISH:

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish.

LENS:

Frosted, high-impact polycarbonate lens.

MOUNTING:

Aluminum mounting base with ABS ground stake included.


LED:

G4 LED Lamp. 1.5 Watts.

ELECTRICAL:

Input voltage range 9 - 15 VAC. Low voltage transformer required to operate (sold separately).

DIMENSIONS

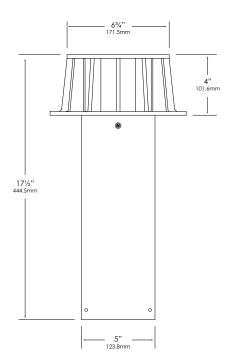



www.VistaPro.com · email@vistapro.com · Fax: (888) 670-VISTA (8478)

1625 Surveyor Avenue · Simi Valley, CA 93063 · (805) 527-0987 · (800) 766-VISTA (8478)