



**PROFESSIONAL
OUTDOOR LIGHTING**



8165 E Kaiser Blvd. Anaheim, CA 92808
p. 714.282.2270
f. 714.676.5558

Report No: L021606505

Date: 3/4/2016



NVLAP LAB CODE 200927-0

Report No: L021606505

Report Prepared For: Vista Professional Outdoor Lighting
1625 Surveyor Ave., Simi Valley CA 93063

Model Number: 1043-X-NS-30-20W-MV-ND

Test: Electrical and Photometric tests

Standards Used: Appropriate part or all test guidelines were used for test performed:
IESNA LM79: 2008 Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products
ANSI NEMA ANSLG C78.377: 2008 Specification of the Chromaticity of Solid State Lighting Products
ANSI C82.77:2002: Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

Description of Sample: Client submitted the sample. Catalog number is 1043-X-NS-30-20W-MV-ND . Received in working and undamaged condition. No modifications were necessary.

Testing Condition: Fixture is tested with no special conditions.

Sample Arrival Date: 2/25/16

Date of Tests: 3/3/16 - 3/4/16

Seasoning of Sample: No seasoning was performed in accordance with IESNA LM-79.

Equipment List

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Yokogawa Digital Power Meter	WT210	MT-EL06-S1	11/18/16
Xitron Power Analyzer	2503AH	MT-EL01	11/30/16
ITECH DC Power Supply	IT6122	PSDC-03-S1	11/17/16
Fluke Digital Thermometer	52k/J	MT-TP02-GC	11/24/16
LLI Type C Goniophotometer System	RMG-C-MKII	CD-LL04-GC	--
LLI 2M Sphere	2MR97	CD-SN03-S2	--
LLI Spectroradiometer	SPR-3000	MT-SC01-S2	Before Use

*All Results in accordance to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.


Test Summary

Manufacturer:	Vista Professional Outdoor Li ghting
Model Number:	1043-X-NS-30-20W-MV-ND
Driver Model Number:	ERP ESS030W-1750-14
Total Lumens:	1212.12
Input Voltage (VAC/60Hz):	120.00
Input Current (Amp):	0.16
Input Power (W):	19.11
Input Power Factor:	0.98
Current ATHD @ 120V(%):	11%
Current ATHD @ 277V(%):	N/A
Efficacy:	63
Color Rendering Index (CRI):	82
Correlated Color Temperature (K):	3028
Chromaticity Coordinate x:	0.4365
Chromaticity Coordinate y:	0.4065
Ambient Temperature (°C):	25.0
Stabilization Time (Hours):	1:00
Total Operating Time (Hours):	2:00
Off State Power(W):	0.00



FIG. 1 LUMINAIRE

*All Results in accordance to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.

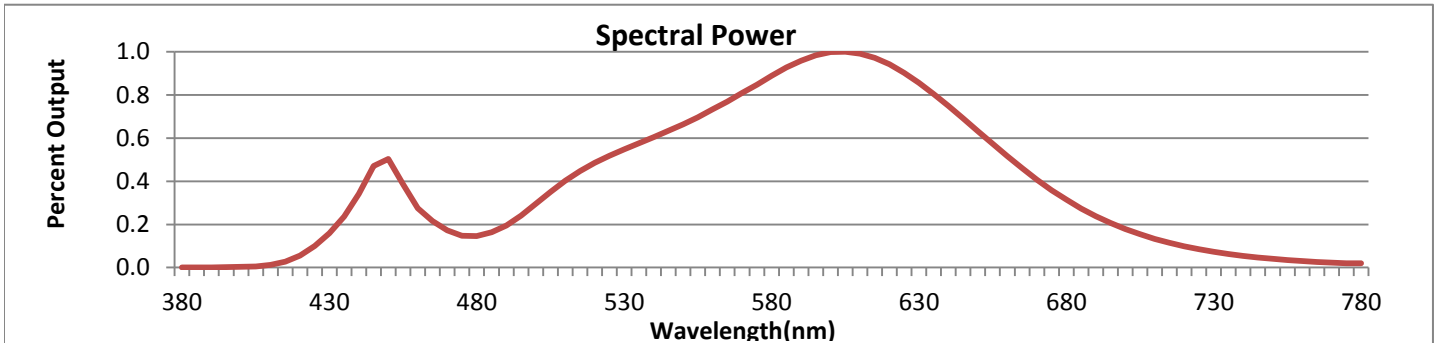


Wavelength	W/m ² nm	440	0.0049	510	0.0058	580	0.0128	650	0.0091	720	0.0014
380	0.0000	450	0.0073	520	0.0070	590	0.0139	660	0.0075	730	0.0011
390	0.0000	460	0.0040	530	0.0079	600	0.0144	670	0.0059	740	0.0008
400	0.0000	470	0.0025	540	0.0087	610	0.0143	680	0.0045	750	0.0006
410	0.0002	480	0.0021	550	0.0096	620	0.0136	690	0.0034	760	0.0004
420	0.0008	490	0.0028	560	0.0106	630	0.0124	700	0.0026	770	0.0003
430	0.0023	500	0.0043	570	0.0117	640	0.0108	710	0.0019	780	0.0003

CRI & CCT

x	0.4365
y	0.4065
u'	0.2493
v'	0.5223
CRI	81.60
CCT	3028
Duv	0.00102

R Values

R1	79.81
R2	87.66
R3	94.65
R4	80.91
R5	79.08
R6	83.63
R7	85.01
R8	61.84
R9	10.14
R10	71.25
R11	79.37
R12	65.62
R13	81.19
R14	96.57

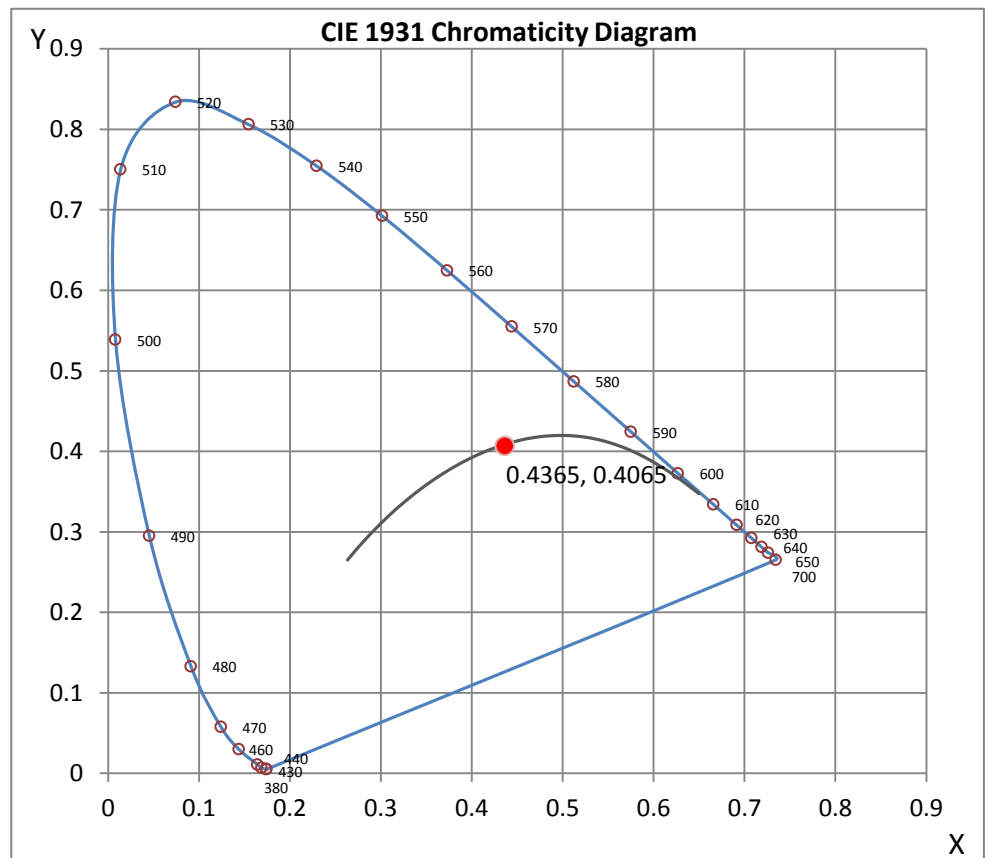

*All Results in accordance to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.

Test Methods

Photometric Measurements - Goniophotometer

A Custom Light Laboratory Type C Rotating Mirror Goniophotometer was used to measure candelas(intensity) at each angle of distribution as defined by IESNA for the appropriate fixture type.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Spectral Measurements - Integrating Sphere

A Sensing Spectroradiometer SPR-3000, in conjunction with Light Laboratory 2 meter integrating sphere was used to measure chromaticity coordinates, correlated color temperature(CCT) and the color rendering index(CRI) for each sample.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Disclaimers:

This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of Federal Government.

Report Prepared by : Keyur Patel

Test Report Released by:



Jeff Ahn
Engineering Manager

Test Report Reviewed by:



Steve Kang
Quality Assurance

**Attached are photometric data reports. Total number of pages: 8*



8165 E. Kaiser Blvd. Anaheim, CA 92808
p. 714.282.2270
f. 714.676.5558

Photometric Test Report

IES FLOOD REPORT
PHOTOMETRIC FILENAME : L021606505.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L021606505
[TESTLAB] LIGHT LABORATORY, INC.
[ISSUEDATE] 3/3/2016
[MANUFAC] VISTA PROFESSIONAL OUTDOOR LIGHTING
[LUMCAT] 1043-X-NS-30-20W-MV-ND
[LUMINAIRE] 2.75"DIA. X 9.75"H. LED ACCENT LUMINAIRE
[MORE] MF DISTRIBUTION
[BALLASTCAT] ERP ESS030W-1750-14
[LAMPPOSITION] 0,0
[LAMPCAT] N/A
[OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND
[MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
[INPUT] 120VAC, 19.11W
[TEST PROCEDURE] IESNA:LM-79-08

Note: Candela values converted from Type-C to Type-B

CHARACTERISTICS

NEMA Type	3 H x 3 V
Maximum Candela	5721
Maximum Candela Angle	0H 0V
Horizontal Beam Angle (50%)	18.9
Vertical Beam Angle (50%)	18.9
Horizontal Field Angle (10%)	45.0
Vertical Field Angle (10%)	45.0
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	342
Beam Efficiency	N.A.
Field Lumens	817
Field Efficiency	N.A.
Spill Lumens	395
Luminaire Lumens	1212
Total Efficiency	N.A.
Total Luminaire Watts	19.11
Ballast Factor	1.00

IES FLOOD REPORT
PHOTOMETRIC FILENAME : L021606505.IES


AXIAL CANDELA

DEG.	HOR.	DEG.	VERT.
90	0	90	0
85	0	85	0
75	0	75	0
65	2	65	2
55	6	55	6
47.5	12	47.5	12
42.5	23	42.5	23
37.5	238	37.5	238
33	399	33	399
29	431	29	431
25.5	486	25.5	486
22.5	571	22.5	571
19.5	732	19.5	732
17	969	17	969
15	1265	15	1265
13	1699	13	1699
11	2294	11	2294
9	3029	9	3029
7	3856	7	3856
5	4646	5	4646
3	5310	3	5310
1	5666	1	5666
0	5721	0	5721
-1	5666	-1	5666
-3	5310	-3	5310
-5	4646	-5	4646
-7	3856	-7	3856
-9	3029	-9	3029
-11	2294	-11	2294
-13	1699	-13	1699
-15	1265	-15	1265
-17	969	-17	969
-19.5	732	-19.5	732
-22.5	571	-22.5	571
-25.5	486	-25.5	486
-29	431	-29	431
-33	399	-33	399
-37.5	238	-37.5	238
-42.5	23	-42.5	23
-47.5	12	-47.5	12
-55	6	-55	6
-65	2	-65	2
-75	0	-75	0
-85	0	-85	0
-90	0	-90	0

ZONAL LUMEN SUMMARY

Zone	%
0-20	60.8
0-30	79.6
0-40	94.8
0-60	99.6
0-80	100
0-90	100
10-90	73.1
20-40	34
20-50	38.3
40-70	5.1
60-80	0.4
70-80	0.1
80-90	0
90-110	0
90-120	0
90-130	0
90-150	0
90-180	0
110-180	0
0-180	100

AXIAL CANDELA DISPLAY

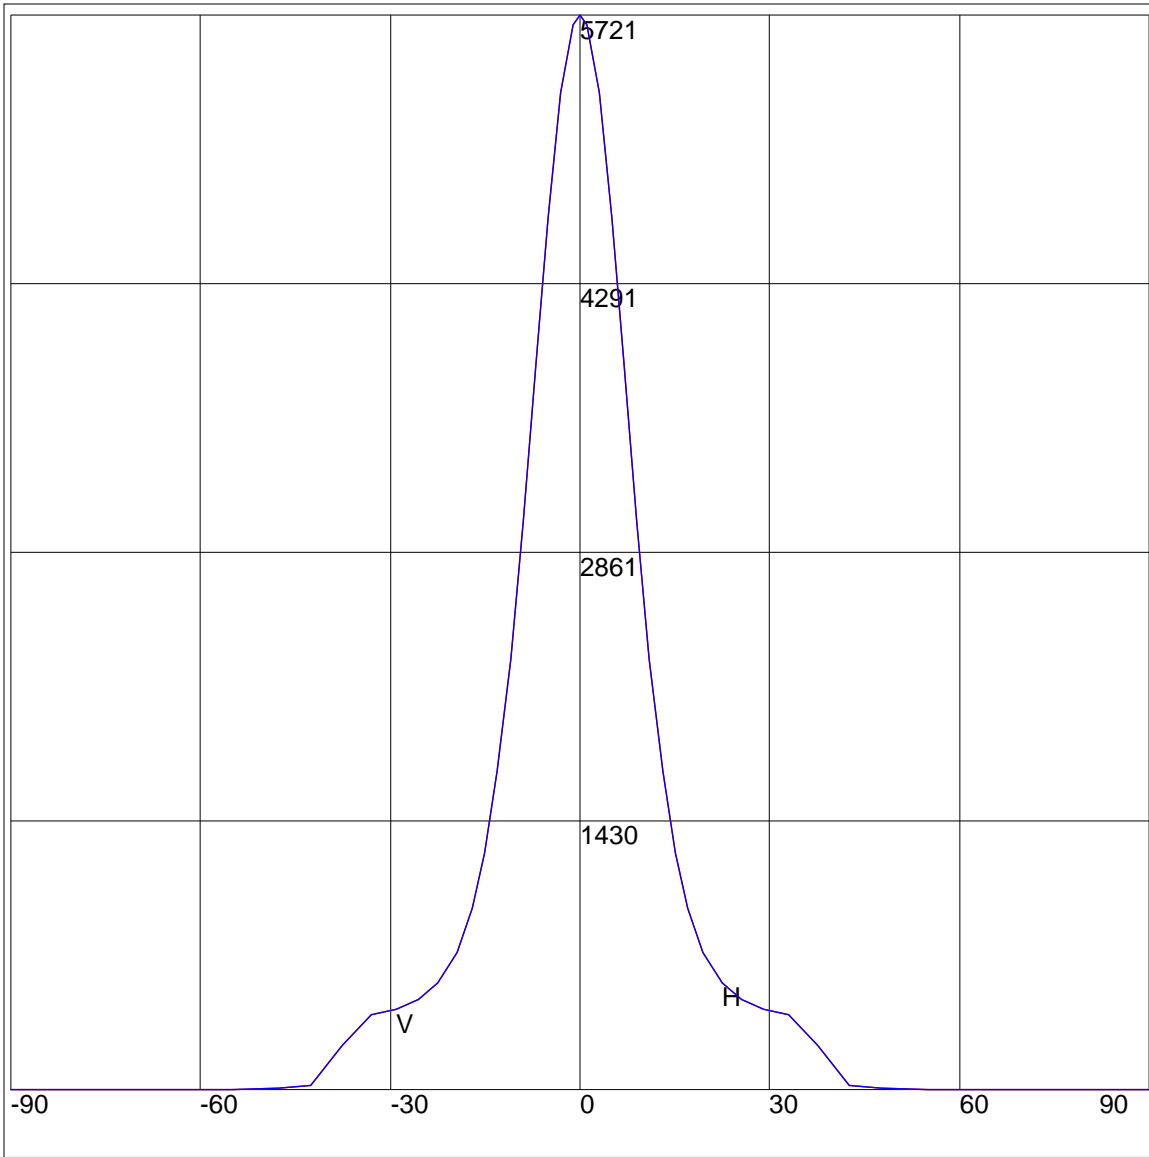


Maximum Candela = 5721 Located At Horizontal Angle = 0, Vertical Angle = 0

H - Horizontal Axial Candela

V - Vertical Axial Candela

ISOCANDELA CURVES

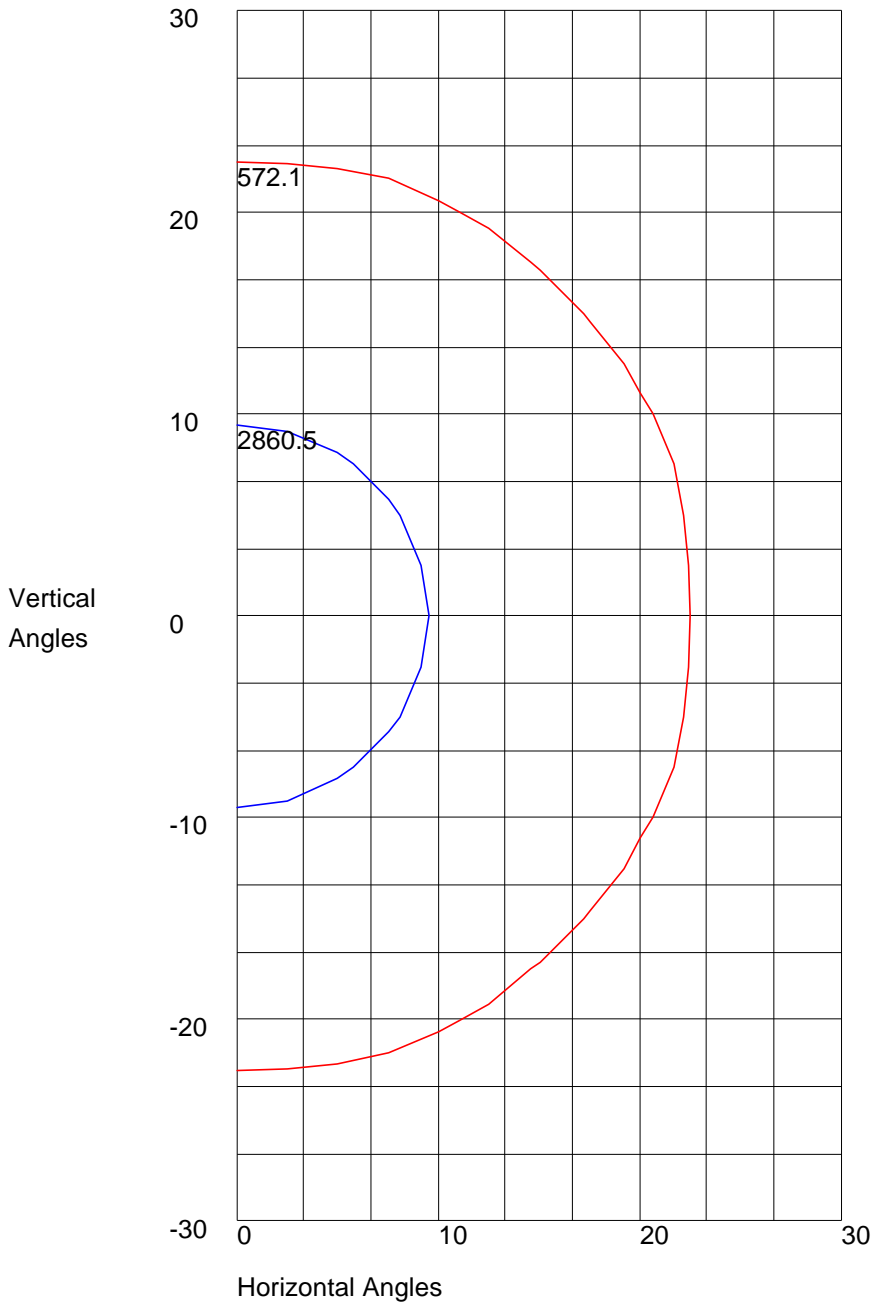

Maximum Candela = 5721 Located At Horizontal Angle = 0, Vertical Angle = 0
50% Maximum Candela = 2860.5
10% Maximum Candela = 572.1