



8165 E Kaiser Blvd.
 Anaheim, CA 92808
 www.lightlaboratory.com

Report No: L032113501



Report No: L032113501

Issue Date: 4/1/2021

Report Prepared For: USTE dba Vista Professional Outdoor Lighting
 1625 Surveyor Ave., Simi Valley CA 93063

Model Number: 1059-XX-VNS-30-H-MV-ND

Test: Photometric/Colorimetric/Electrical Test

Standards Used: Appropriate part or all test guidelines were used for test performed:
IESNA LM79: 2008 Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products
ANSI NEMA ANSLG C78.377: 2008 Specification of the Chromaticity of Solid State Lighting Products
ANSI C82.77:2002: Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

Description of Sample: Client submitted the sample. Received in working and undamaged condition. No modifications were necessary.

Special Test Condition: Fixture is tested with no special conditions.

Sample Arrival Date: 3/30/21

Date of Tests: 3/30/21 - 4/1/21

Seasoning of Sample: No seasoning was performed in accordance with IESNA LM-79.

Equipment List

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Yokogawa Digital Power Meter	WT210	MT-EL06-S4	1/9/22
BK PRECISION	1747	PS-DC04	1/10/22
Fluke Digital Thermometer	52K/J	MT-TP05	1/10/22
LLI Type C Goniophotometer System	RMG-C-MKII	CD-LL04-GC	--
LLI 2M Sphere	2MR97	CD-SN03-S2	--
LLI Spectroradiometer	SPR-3000	MT-SC01-S2	Before Use

General Information

Manufacturer:	USTE dba Vista Professional Outdoor Lighting
Model Number:	1059-XX-VNS-30-H-MV-ND
Driver Model Number:	ERP SLM100W-1.7-56-TA

Test Summary

Total Lumens:	5887.08
Efficacy:	61.67
Color Redering Index:	82.7
Correlated Color Temperature:	3089
Input Voltage (VAC/60Hz):	119.98
Input Current (Amp):	0.8630
Input Power (W):	95.46
Input Power Factor:	0.9868
Current ATHD (%):	N/A

Test Condition

Ambient Temperature (°C):	25.0
Stabilization Time (Hours):	0:30
Total Operating Time (Hours):	1:10


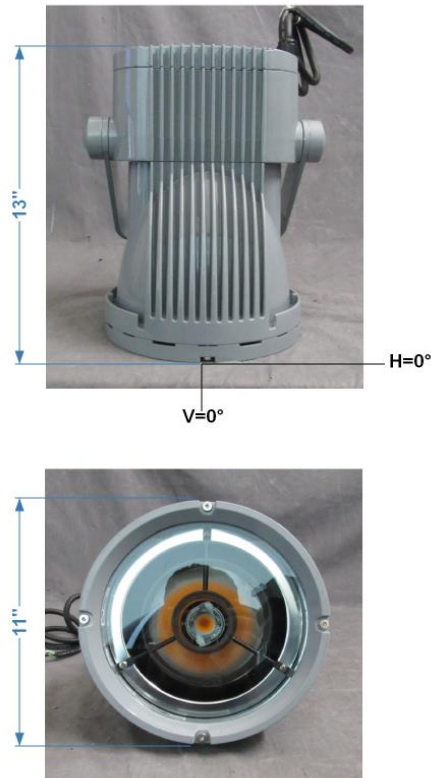


FIG. 1 LUMINAIRE

Colorimetry Test Results

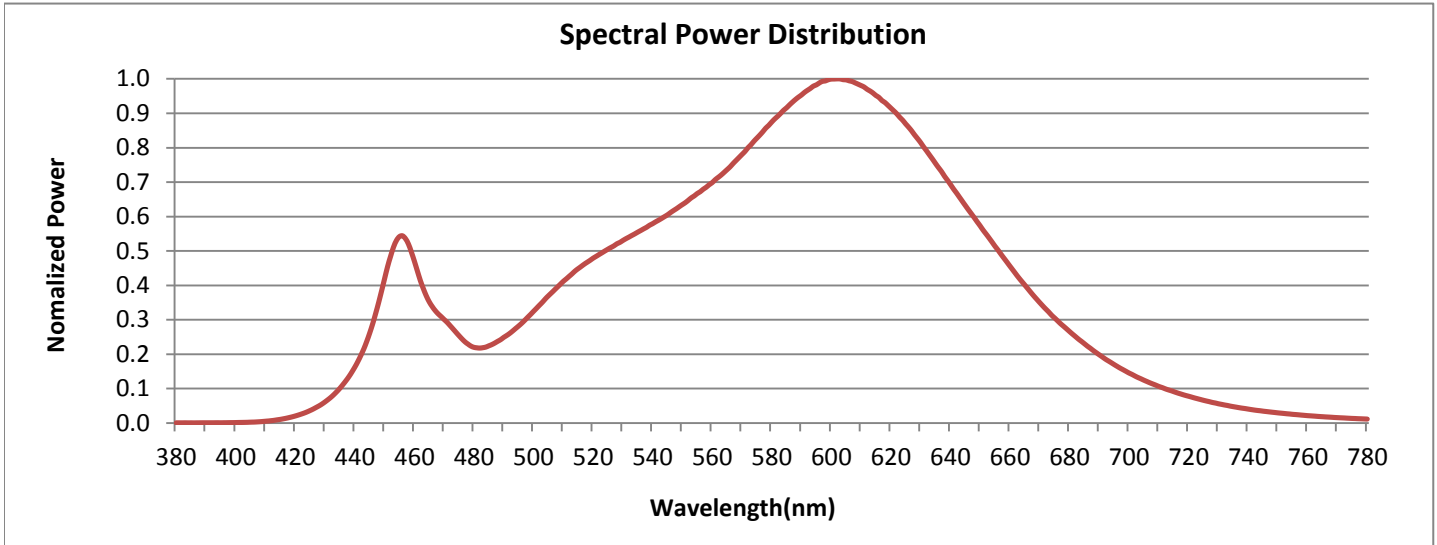


CRI & CCT

x	0.4334
y	0.4076
u'	0.2468
v'	0.5222
CRI	82.70
CCT	3089
Duv	0.00191

R Values

R1	80.84
R2	90.93
R3	96.89
R4	80.32
R5	80.95
R6	89.25
R7	83.09
R8	59.07
R9	6.61
R10	78.96
R11	79.18
R12	68.05
R13	83.27
R14	98.83
R15	73.13

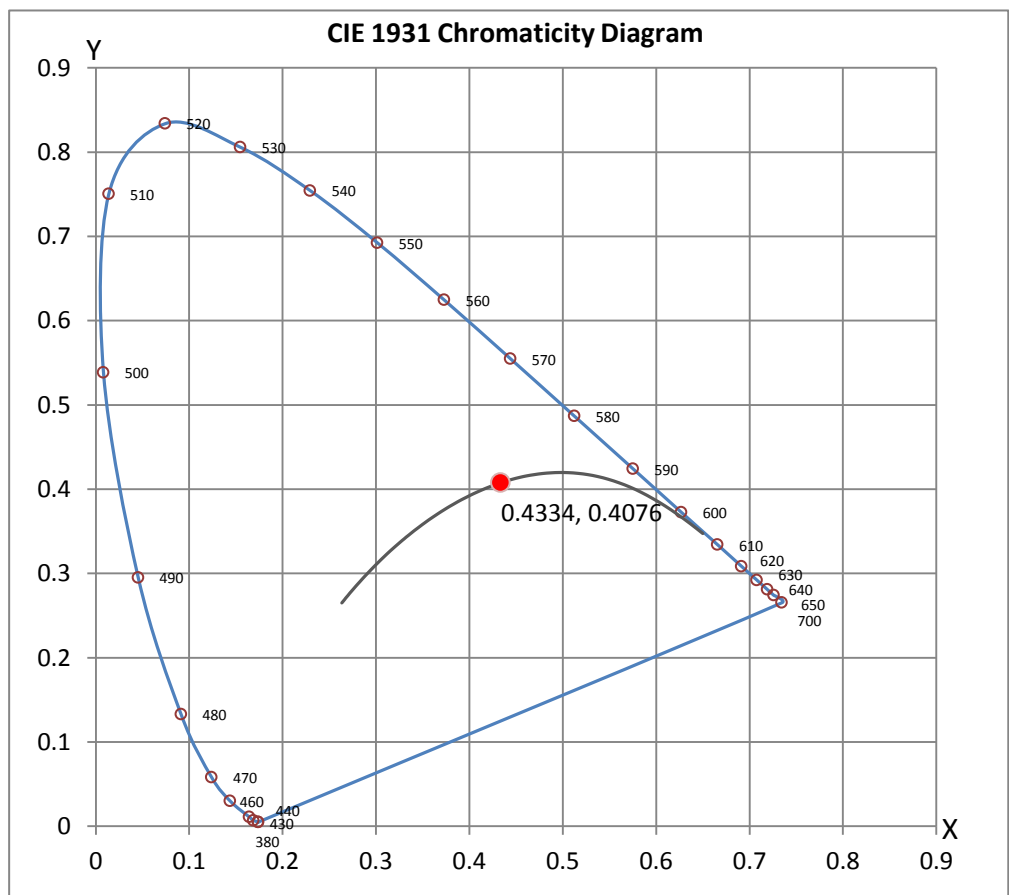

Test Methods

Photometric Measurements - Goniophotometer

A Custom Light Laboratory Type C Rotating Mirror Goniophotometer was used to measure candelas(intensity) at each angle of distribution as defined by IESNA for the appropriate fixture type.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Spectral Measurements - Integrating Sphere

A Sensing Spectroradiometer SPR-3000, in conjunction with Light Laboratory 2 meter integrating sphere was used to measure chromaticity coordinates, correlated color temperature(CCT) and the color rendering index(CRI) for each sample.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Disclaimers:

This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of Federal Government.

Report Prepared by : Keyur Patel

Test Report Reviewed by:



Steve Kang
Quality Assurance

**Attached are photometric data reports. Total number of pages: 8*



8165 E. Kaiser Blvd. Anaheim, CA 92808
 www.lightlaboratory.com

Photometric Test Report

IES FLOOD REPORT
PHOTOMETRIC FILENAME : L032113501.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] L032113501
 [TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)
 [ISSUEDATE] 4/1/2021
 [MANUFAC] USTE dba Vista Professional Outdoor Lighting
 [LUMCAT] 1059-XX-VNS-30-H-MV-ND
 [LUMINAIRE] LED FLOODLIGHT
 [BALLASTCAT] ERP SLM100W-1.7-56-TA
 [OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND
 [MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
 [INPUT] 119.98VAC, 95.46W
 [TEST PROCEDURE] IESNA:LM-79-08

Note: Candela values converted from Type-C to Type-B

CHARACTERISTICS

NEMA Type	2 H x 2 V
Maximum Candela	88252
Maximum Candela Angle	-3H 0V
Horizontal Beam Angle (50%)	11.3
Vertical Beam Angle (50%)	12.8
Horizontal Field Angle (10%)	23.7
Vertical Field Angle (10%)	24.5
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	2935
Beam Efficiency	N.A.
Field Lumens	4861
Field Efficiency	N.A.
Spill Lumens	1026
Luminaire Lumens	5887
Total Efficiency	N.A.
Total Luminaire Watts	95.46
Ballast Factor	1.00

IES FLOOD REPORT
PHOTOMETRIC FILENAME : L032113501.IES


AXIAL CANDELA

DEG.	HOR.	DEG.	VERT.
90	0	90	0
85	17	85	17
75	17	75	17
65	19	65	19
55	23	55	23
47.5	33	47.5	33
42.5	51	42.5	51
37.5	91	37.5	91
33	163	33	163
29	278	29	278
25.5	345	25.5	345
22.5	482	22.5	482
19.5	861	19.5	861
17	1727	17	1727
15	3439	15	3439
13	6636	13	6636
11	12588	11	12588
9	22455	9	22455
7	35719	7	35719
5	64014	5	64014
3	88252	3	88252
1	87927	1	87927
0	87908	0	87908
-1	87927	-1	87927
-3	88252	-3	88252
-5	64014	-5	64014
-7	35719	-7	35719
-9	22455	-9	22455
-11	12588	-11	12588
-13	6636	-13	6636
-15	3439	-15	3439
-17	1727	-17	1727
-19.5	861	-19.5	861
-22.5	482	-22.5	482
-25.5	345	-25.5	345
-29	278	-29	278
-33	163	-33	163
-37.5	91	-37.5	91
-42.5	51	-42.5	51
-47.5	33	-47.5	33
-55	23	-55	23
-65	19	-65	19
-75	17	-75	17
-85	17	-85	17
-90	0	-90	0

ZONAL LUMEN SUMMARY


Zone	%
0-20	93.7
0-30	96.8
0-40	98.2
0-60	99.1
0-80	99.8
0-90	100
10-90	27.2
20-40	4.5
20-50	5.1
40-70	1.2
60-80	0.6
70-80	0.3
80-90	0.2
90-110	0
90-120	0
90-130	0
90-150	0
90-180	0
110-180	0
0-180	100

AXIAL CANDELA DISPLAY

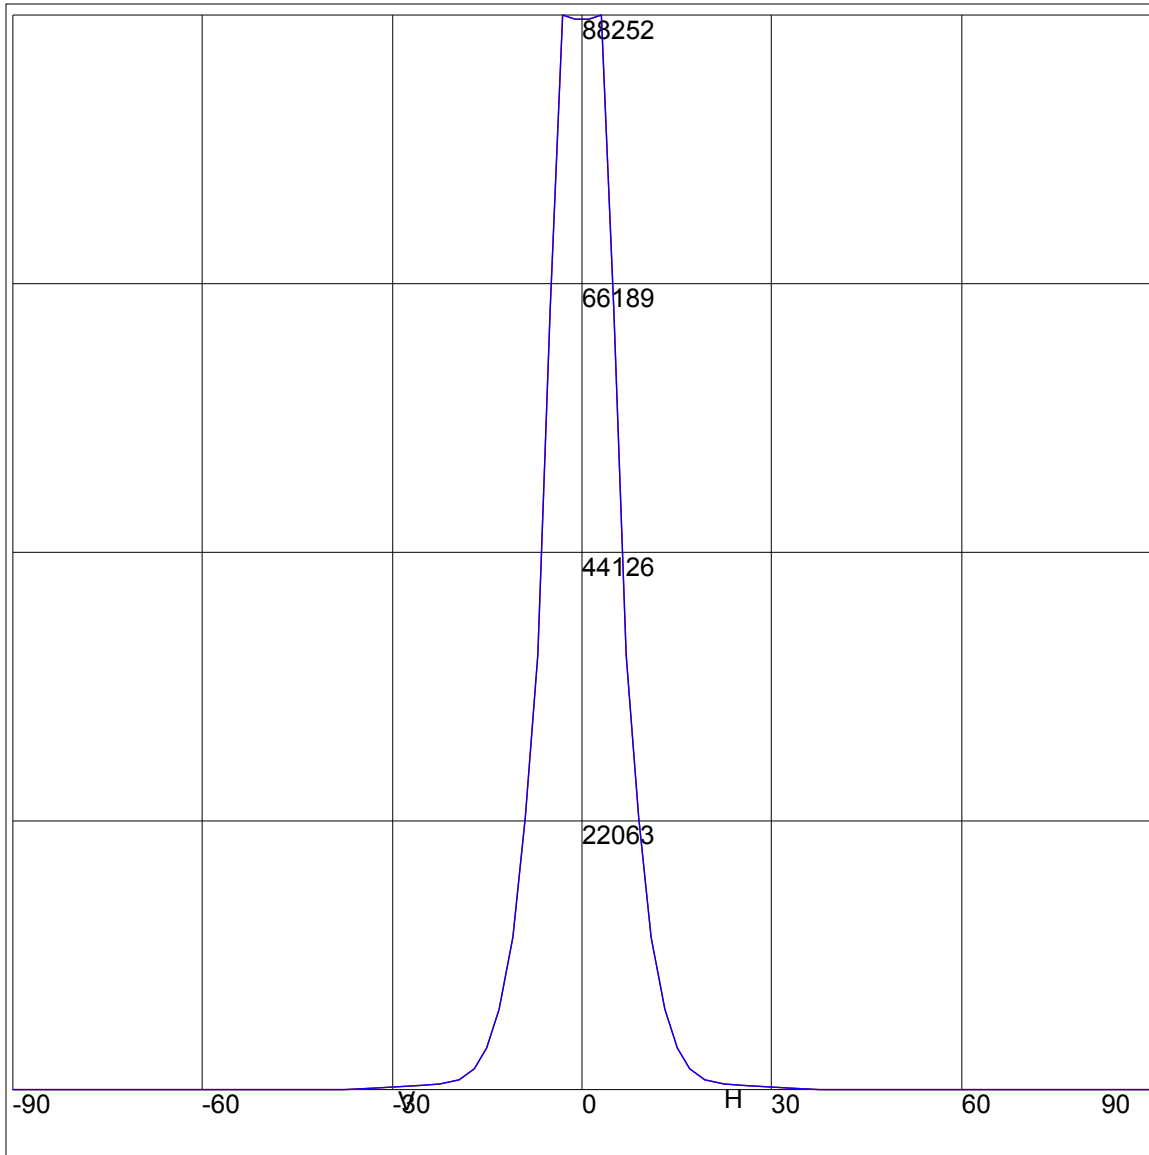

Maximum Candela = 88252 Located At Horizontal Angle = -3, Vertical Angle = 0
H - Horizontal Axial Candela
V - Vertical Axial Candela

ISOCANDELA CURVES

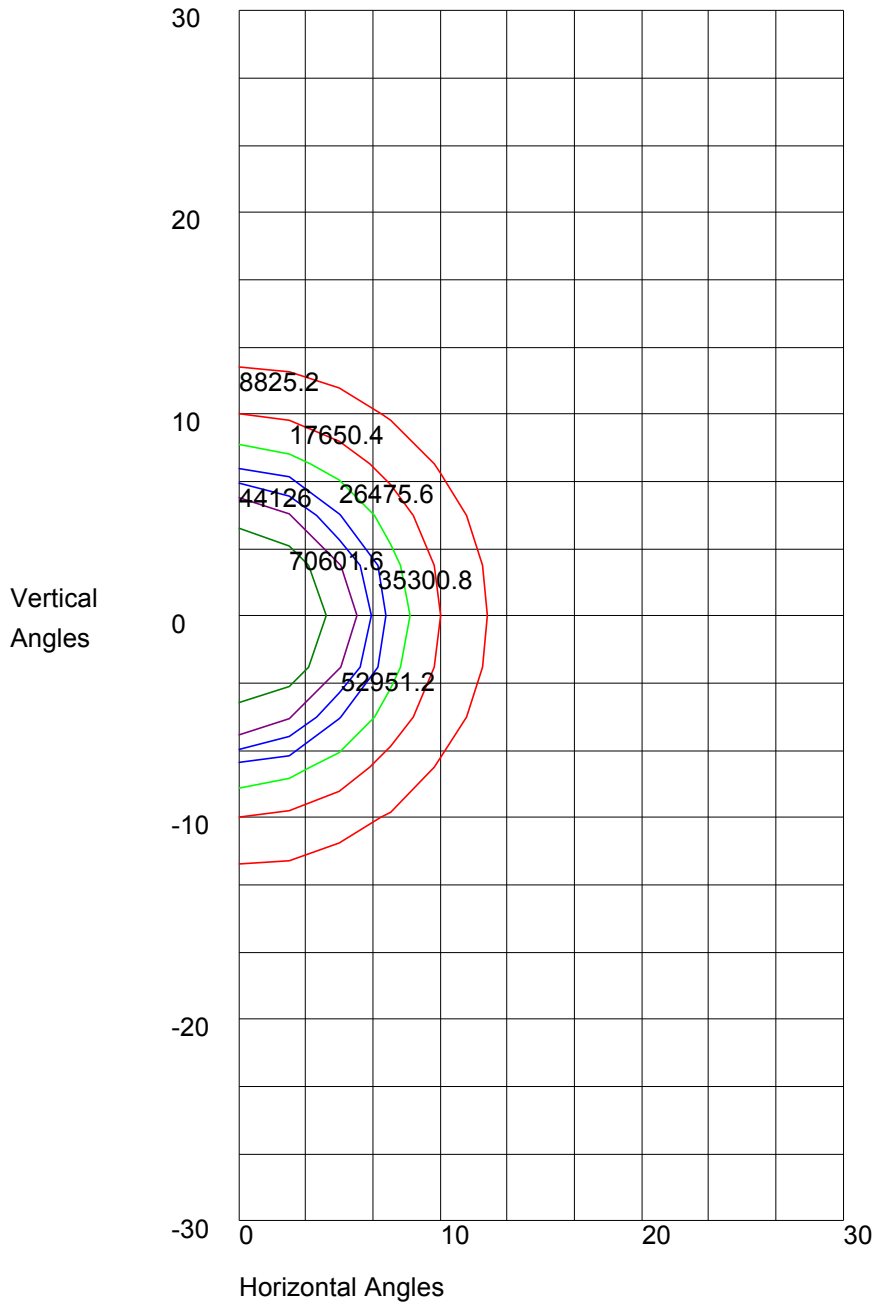

Maximum Candela = 88252 Located At Horizontal Angle = -3, Vertical Angle = 0
50% Maximum Candela = 44126
10% Maximum Candela = 8825.2