



PROFESSIONAL
OUTDOOR LIGHTING

Type:

Model:

Project:

SPECIFICATION SHEET

MODEL 1009 Architectural Series • Up & Accent

FIXTURE SPECIFICATIONS:

LAMP TYPE:

R40, PAR38 - Incandescent and HID. 175W Maximum. Lamp not included with fixture, order separately. HID lamps require a ballast.

HOUSING:

Injection-molded, glass-reinforced Ryton™ R4 composite fitted to the housing with dual silicone o-ring gaskets, providing a superior weather-tight seal.

SHROUD:

Injection-molded, glass-reinforced Ryton™ R4 composite fitted to the housing with dual silicone o-ring gaskets, providing a superior weather-tight seal.

FINISH:

Durable powder coat finish available in Black, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request.

SOCKET/LAMP HOLDER:

Top grade porcelain, medium base 4KV pulse rated socket with spring center contact and a silicone rubber jacket protector to prevent moisture/debris from entering socket.

LENS:

Flat or convex, clear, tempered, shock and heat-resistant, soda-lime glass

lens. Optical effect lenses are available; please see the lens and accessories columns in the fixture ordering information chart.

MOUNTING:

Injection-molded, glass-reinforced Zytel® HTN composite adjustable knuckle with ½" NPT and jam nut. Fixture may be mounted into threaded hubs in junction boxes, ground stakes, grade-mounted ballast enclosures or tree mount boxes. Please see fixture ordering information for mounting selection.

FASTENERS:

All fasteners are stainless steel.

WIRING:



Prewired with 200°C-rated wire along with a grounded lead.

CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for line voltage landscape luminaires (UL 1598). The maximum wattages allowed by Underwriters Laboratories (UL) for the U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about the maximum wattages allowed by UL Canadian standards.

All Vista luminaires are **MADE IN THE U.S.A.**

DIMENSIONS:

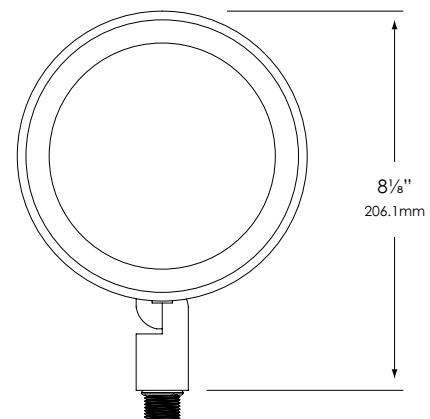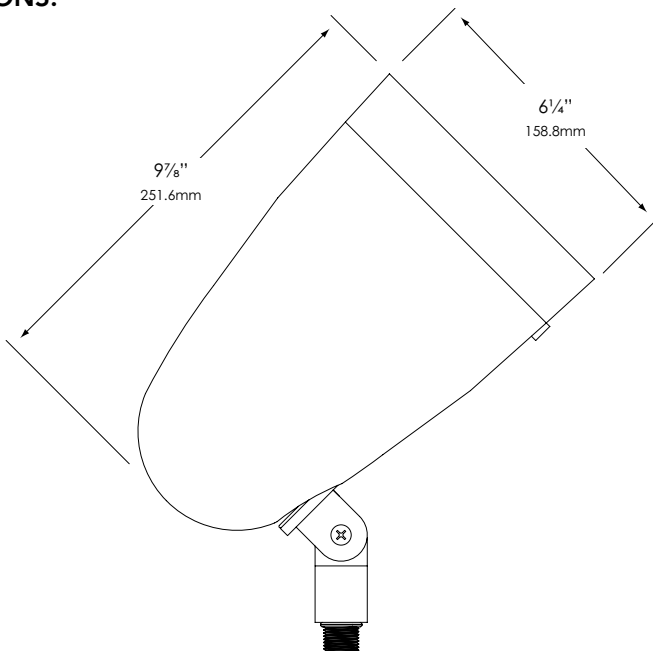

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATION SHEET

MODEL 1009 Architectural Series • Up & Accent Lights

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: 1009-B-CX

MODEL	FINISH	ACCESSORIES
1009	Standard	FT- Flat Clear lens BL- Flat Cool Blue lens SL- Flat Spread lens FR- Flat Frosted lens CX- Convex Clear lens CBL- Convex Cool Blue lens CFR- Convex Frosted lens DBL- Flat Dark Blue lens GL- Flat Dark Green lens RL- Flat Red lens YL- Flat Amber lens HL – Honeycomb louver
	B - Black	
	DZ - Dark Bronze	
	GT - Granite	
	W - White	
	Premium	
	BR - Architectural Brick	
	LZ - Light Bronze	
	SB - Special Bronze	
	GG - Glossy Gray	
R - Rust		
HG - Hunter Green		
WB - Weathered Bronze		
WI - Weathered Iron		
GM - Graphite Metallic		
Hand Finished		
G - Verde		
P - Pewter		
M - Mocha		
OF - Olde Finish		

Lamp not included with fixture, order separately - For available lamps, see Lamp Guide - Vista catalog.

Note: HD lamps require a ballast.