

# Integrated Efficiency

*LED Compact Integrated Up & Accent Fixtures*

VISTA LED COMPACT INTEGRATED UP & ACCENT FIXTURES



5013i

5014i




LANDSCAPE  
LIGHTING

# 5013i & 5014i

## INTEGRATED LED UP & ACCENT LIGHTS

LED Compact Up & Accent Fixtures combine a sleek, compact design along with exceptional beam spread and control. **In fact, these up & accent fixtures deliver more lumens per watt than standard drop-in LED lamps.** So even when concealed in the landscape, the performance is undeniably spectacular.

- » **Integrated**, single LED chip/emitter available in:
  - 1.5W** (20W Halogen equivalent)
  - 2.5W** (35W Halogen equivalent)
  - 3.5W** (50W Halogen equivalent)
- » Advanced Chip-On-Board (COB) LED technology
- » Color temperature: 2950°K (W-Warm)
- » Outputs up to 400 delivered lumens. More lumens per watt than standard drop-in LED lamps
- » High performance optic. Available in 25°, 36° and 60° spreads
- » Operating Voltage: 9–15 VAC
- » Tool-Free Rotatable Shroud (patent pending) allows for easy aiming by hand
- » Integrated and potted driver. Fixture is sealed. No serviceable parts inside.
- » Dimmable
- » Sleek bordered high-impact tempered lens
- » Lens available clear or frosted
- » Compact Design Enhances Aesthetics: Can be conveniently concealed throughout the landscape.
- » Injection-molded, glass-reinforced Ryton® R-4 composite adjustable knuckle with ½" NPT.
- » Mounting options: Fixtures may be mounted into threaded hubs in junction boxes, ground stakes, tree-mount boxes or mounting canopies.
- » Available in 5 standard finishes: 13 Additional premium finishes also available.
- » Designed, manufactured and assembled in the USA.

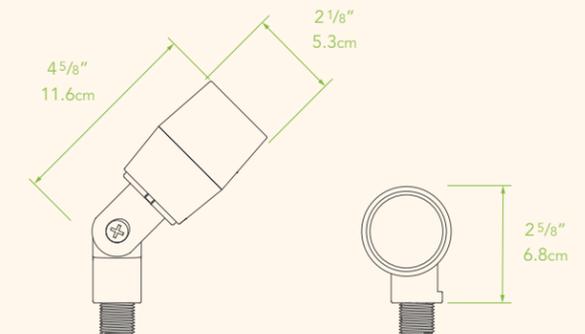

### FIXTURE SPECIFICATIONS: MODELS 5013i and 5014i

#### HOUSING:

Constructed of die-cast, copper-free aluminum. All fasteners are stainless steel.

#### LENS:

Clear or Frosted, tempered, shock and heat resistant, soda-lime glass lens safeguards the lamp and optics.

#### LED:

Fixtures are available with an integrated LED Assembly – 1.5W, 2.5W and 3.5W. Color temperature W-Warm (2950K).

#### OPTICS:

Available in 25°, 36° and 60° spreads.

#### ELECTRICAL:

Input voltage range of 9–15V AC. Power is regulated by the driver to


achieve uniform illumination throughout the cable run. Integral surge and reverse polarity protection.

#### MOUNTING:

Mounts are injection-molded, glass-reinforced Ryton® R-4 composite adjustable knuckle with ½" NPT. Fixture may be mounted into threaded hubs in junction boxes, ground stakes, tree-mount boxes, or mounting canopies. Please see fixture ordering information for mounting selection.

#### WIRING:

Fixtures are prewired with a three-foot pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

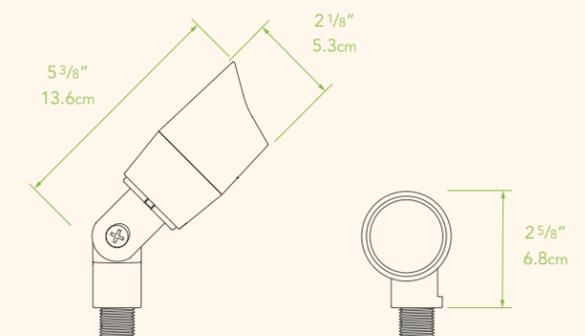

### MODEL 5014i



**PROFESSIONAL  
OUTDOOR LIGHTING**



**AMERICAN MADE**  
*Since 1984*

---

1625 Surveyor Ave | Simi Valley, CA 93063

t: 805-527-0987 | 800-766-VISTA (8478) | f: 888-670-VISTA (8478) | [email@vistapro.com](mailto:email@vistapro.com) | [vistapro.com](http://vistapro.com)

Copyright © Vista Professional Outdoor Lighting 2017. All rights reserved. Printed in the USA. LT1839 (4/18)