



# MODEL 1093 | Specification Sheet

## Commercial Series • Floodlight

TYPE:  MODEL:

PROJECT:

### PRODUCT FEATURES



Wattage	75 W maximum
Voltage	120 VAC
Lamp Type	PAR30 compatible (lamp not included)
Dimensions	5½" DIA x [ 7"   9¾"   12¾" ] D

### ORDERING INFORMATION

EXAMPLE: 1093-B-CX-N-120-HL

MODEL	FINISH	LENS	SHROUD	INPUT VOLTAGE	ACCESSORIES
1093				120	

MODEL	FINISH	LENS	SHROUD	INPUT VOLTAGE	ACCESSORIES
1093	<b>B</b> Black	<b>CX</b> Crowned Clear Lens <b>CBL</b> Crowned Cool Blue Lens <b>CFR</b> Crowned Frosted Lens	<b>N</b> No shroud <b>M</b> Medium Shroud <b>L</b> Long Shroud	<b>120</b> 120 VAC	<b>HL</b> Honeycomb Louver
	<b>Z</b> Architectural Bronze				
	<b>DZ</b> Dark Bronze				
	<b>GT</b> Granite				
	<b>W</b> White				
	<b>BR</b> Architectural Brick				
	<b>LZ</b> Light Bronze				
	<b>SB</b> Special Bronze				
	<b>GG</b> Glossy Gray				
	<b>R</b> Rust				
	<b>HG</b> Hunter Green				
	<b>WB</b> Weathered Bronze				
	<b>WI</b> Weathered Iron				
	<b>GM</b> Graphite Metallic				
	<b>G</b> Verde				<b>ORDERING NOTES</b> Fixture shipped with no lamp
	<b>P</b> Pewter				
	<b>M</b> Mocha				
	<b>OF</b> Olde Finish				



PROFESSIONAL  
OUTDOOR LIGHTING

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)  
1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)  
Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction  
of the fixture shown without further notification.



## SPECIFICATIONS

### LAMP TYPE:

PAR30 compatible. Lamp not included.

### HOUSING:

Injection-molded, glass-reinforced Ryton™ R4 composite.  
Housing aimable utilizing Vista's patented Infinity Knuckle.

### SHROUD:

Injection-molded, glass-reinforced Ryton™ R4 composite fitted to the housing with a molded gasket.

### FINISH:

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request.

### LAMP HOLDER:

Porcelain medium base 4KV pulse rated socket with spring center contact and silicone rubber jacket protector.

### LENS:

Clear, tempered, shock & heat resistant, soda-lime glass lens - crowned (convex) to promote water runoff. Optical effect lenses are available.

### WIRING:

Prewired with 150° C-rated wire.

### MOUNTING:

Infinity Knuckle – Die-cast, copper-free aluminum, stainless steel stem with ½" NPT thread. A fully sealed spherical grommet allows for precise aiming and retention.

### FASTENERS/INSERTS:


All fasteners are stainless steel.

### CERTIFICATION:

cULus wet location listed (UL 1598).  
The maximum wattages allowed by Underwriters Laboratories (UL) for the U.S. & Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about the maximum wattages allowed by UL Canadian standards.

Ingress Protection Rating: IP65

## DIMENSIONS

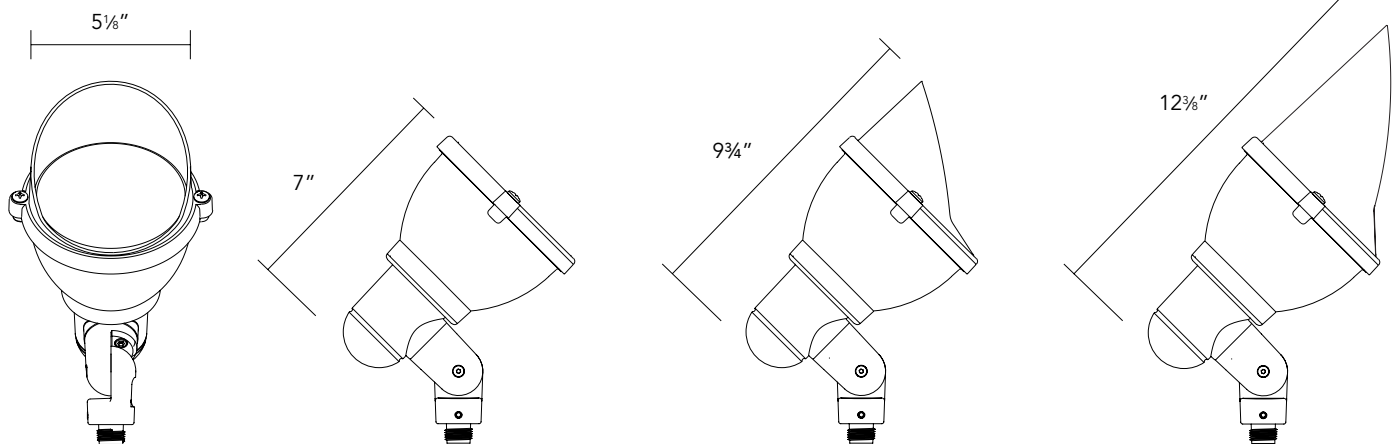

No Shroud **N**

Medium Shroud **M**

Long Shroud **L**

