

Type: _____
 Model: _____
 Project: _____

SPECIFICATION SHEET

MODEL: 1427 - 120V Series: Bollards & Beacons

FIXTURE SPECIFICATIONS:

HOUSING:

Die-cast, copper-free aluminum.

POST:

5" diameter, heavy gauge, extruded aluminum (1/8" wall thickness).

FINISH:

Polyester powder-coat finish available in Black, Verde, Architectural Brick, Architectural Bronze, Light Bronze, Dark Bronze, Granite, Pewter, Terra-cotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron, and White.

SOCKET/LAMP HOLDER:

Compact fluorescent thermoplastic socket.

BALLAST:

High-power factor ballast rated for -20°F starting, 120-volt standard.

LENS:

Clear, frosted or prismatic threaded and gasketed, tempered glass vapor globe.

LAMP TYPE:

ED-17- Mercury Vapor, Metal Halide, or High Pressure Sodium. 70W Maximum. Ballast is integrated into fixture. Please specify ballast type from the fixture ordering information chart. Lamp not included with fixture, order separately.

MOUNTING:

Aluminum mounting base and foundation anchor rods included.

FASTENERS:

All fasteners are stainless steel.

WIRING:


Prewired with 200°C-rated wire along with a grounded lead.

CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for line voltage landscape luminaires (UL 1598). The maximum wattages allowed by Underwriters Laboratories (UL) for the U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about the maximum wattages allowed by UL Canadian standards.

All Vista luminaires are **MADE IN THE U.S.A.**

DIMENSIONS:

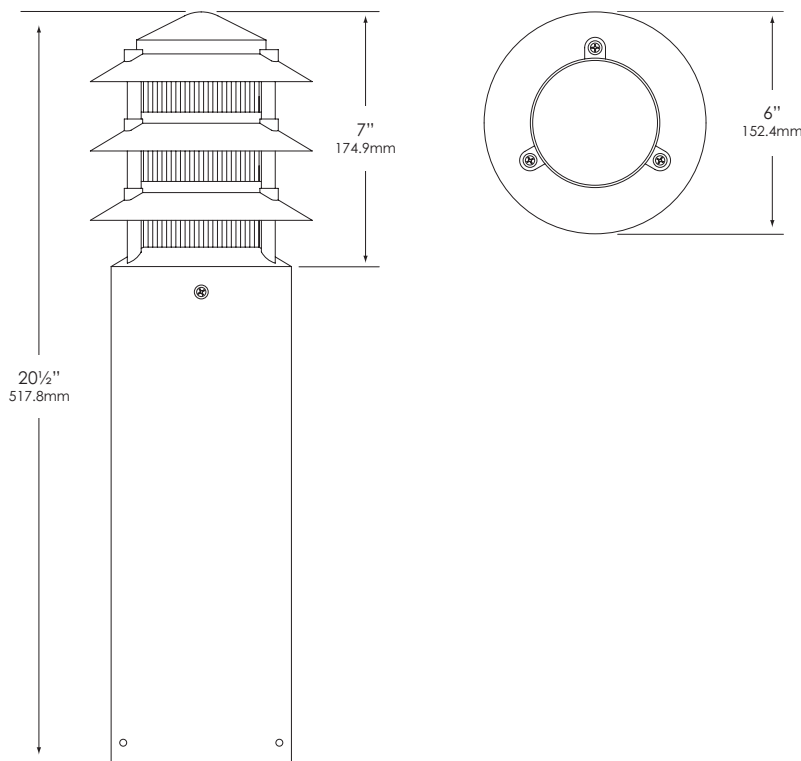

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.

SPECIFICATION SHEET

MODEL: 1427 - 120V Series: Bollards & Beacons

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example

EXAMPLE: 1427-B-CR-70-MH-120

MODEL	FINISH	LENS	INTEGRATED FLUORESCENT BALLAST		
			WATTAGE	BALLAST	VOLTAGE
1427	B- Black	CR- Clear lens FR- Frosted lens PR- Prismatic lens	35* , 50, 70 50, 70 35, 50, 70	MH- Metal Halide MV- Mercury Vapor HPS- High Pressure Sodium	120 208 240 277 MT- Multi-tap
	G- Verde				
	BR- Architectural Brick				
	Z- Architectural Bronze				
	LZ- Light Bronze				
	DZ- Dark Bronze				
	GT- Granite				
	P- Pewter				
	TC- Terracotta				
	R- Rust				
HG- Hunter Green					
M- Mocha					
WB- Weathered Bronze					
WI- Weathered Iron					
W- White					

Lamp not included with fixture, order separately. - For available lamps, see Lamp Guide, Vista catalog.

*35-watt MH ballasts available in 120 or 277 volts only.