



PROFESSIONAL  
OUTDOOR LIGHTING

Type:

Model:

Project:

## SPECIFICATION SHEET

### MODEL 2149-LED Landscape Series • Brass & Copper • Step & Brick Lights

#### FIXTURE SPECIFICATIONS:

##### HOUSING:

Injection-molded, glass-reinforced Ryton® R-4 composite for strength & high UV stability – warranted for ten years against corrosion. Cover plate is fitted to recessed box with a silicone O-ring gasket.

##### COVER PLATE:

Precision CNC-machined solid brass faceplate, fitted to housing with a silicone O-ring gasketed lens – providing a superior weather-tight seal.

##### FINISH:

Natural Brass, Olde Brass, or Stainless Steel lens cover. Housing available in black only.

##### LENS:

Clear, tempered, shock & heat-resistant, soda-lime glass lens- crowned (convex) to promote water runoff. Optical effect lenses are available; see accessories column on fixture ordering information chart.

##### LAMP TYPE:

High Output LED with Vista exclusive smart-driver, powered to operate for 50,000 hours.

##### OPTICS/AIMING:

Adjustable lamp bracket provides up to  $\pm 25^\circ$  of tilt for precise beam control. Lamp bracket can be locked into place to prevent disrupting lamp position when relamping.

##### MOUNTING:

Recessed mounting box has two  $\frac{1}{2}$ " NPT inlets. Optional concrete mounting kit available, please see accessories column on fixture ordering information.

##### FASTENERS/INSERTS:


All fasteners are stainless steel with brass inserts.

##### WIRING:

Provided with a three-foot pigtail of 18-2 direct-burial cable & underground connectors for a secure connection to supply cable.

All Vista luminaires are **MADE IN U.S.A.**

#### DIMENSIONS:

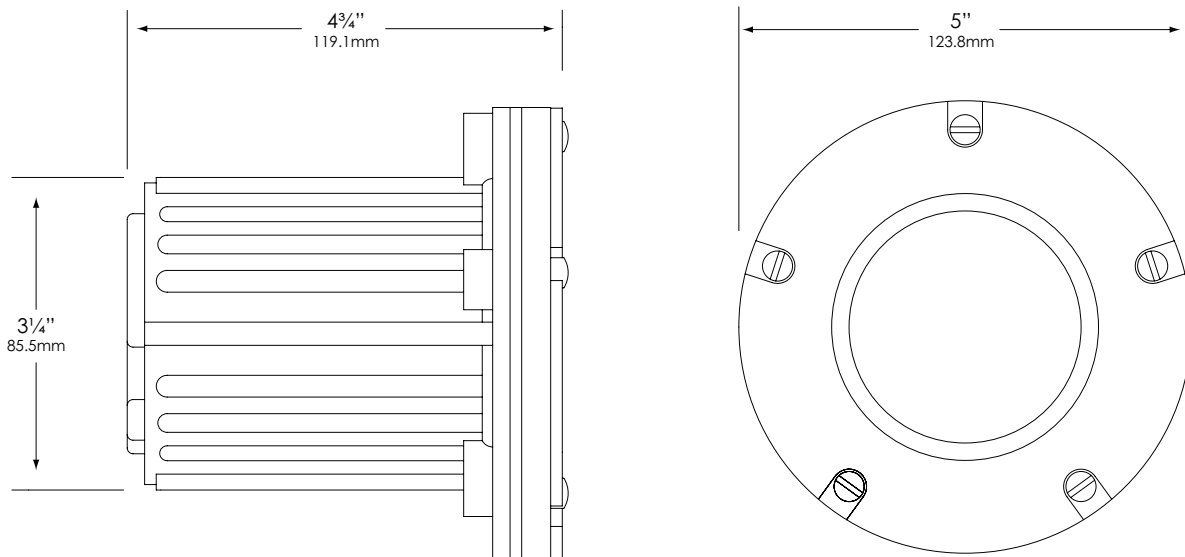

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



## SPECIFICATION SHEET

### MODEL 2149-LED Landscape Series • Brass & Copper • Step & Brick Lights

#### FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

**EXAMPLE: SL-2149-BSN-W-LF3MF-HL**

MOUNTING	MODEL	FINISH	COLOR TEMP	LAMP	ACCESSORIES
SL - Step Light	2149	BSN - Natural Brass BSO - Olde Brass SS - Stainless Steel	W - Warm C - Cool	LF3SP 3 emitter, 5W, Spot LF3MF 3 emitter, 5W, Med. Flood LF3WF 3 emitter, 5W, Wide Flood LF6SP 6 emitter, 10W, Spot LF6MF 6 emitter, 10W, Med. Flood LF6WF 6 emitter, 10W, Wide Flood LF-9-SP 9 emitter, 17W, Spot LF-9-MF 9 emitter, 17W, Med. Flood LF-9-WF 9 emitter, 17W, Wide Flood  LED - Group F Emitter Qty - 3, 6, or 9 Temperature - Warm (W) or Cool (C) Operating voltage range - 10.5 to 15V.  (Please see lamp order code column on lamp guide, Vista product catalog.)	CBL - Crowned Blue Lens DBL - Dark Blue Lens SL - Spread Lens GL - Dark Green Lens RL - Red Lens YL - Amber Lens HL - Honeycomb Louver JBPC - Concrete Mounting Kit

Fixtures shipped with standard lamp, unless otherwise specified.