

SPECIFICATION SHEET

MODEL: CGB1H - HID Ballast Encloser

SPECIFICATIONS:

DESCRIPTION:

In-Ground HID Ballast Box
 Composite cover with 1/2" NPT for direct mount application

CONSTRUCTION:

Injection molded, fiber reinforced polymer with heavy wall construction

BALLAST TYPES:


Metal Halide, Mercury Vapor, and High Pressure Sodium

CONDUIT ENTRIES:

Splice compartment has two 3/4" NPT conduit entries and one 1/2" NPT entry for remote access

All Vista accessories are **MADE IN THE U.S.A.**

DIMENSIONS:

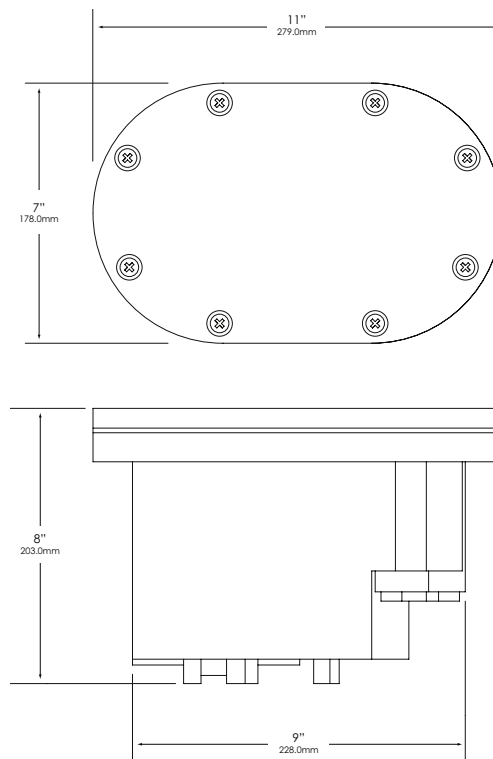

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.

SPECIFICATION SHEET

MODEL: CGB1H - HID Ballast Encloser

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example

EXAMPLE: CGB1H-B-70-MH-120

MODEL	FINISH	WATTAGE	BALLAST	VOLTAGE
CGB1H	B - Black	35, 70, 100, 150	MH - Metal Halide	120
	G - Verde			208
	BR - Architectural Brick	50, 75, 100	MV - Mercury Vapor	240
	LZ - Light Bronze			277
	DZ - Dark Bronze	35, 50, 70, 100, 150	HPS - High Pressure Sodium	
	GT - Granite			
	P - Pewter			
	TC - Terra-cotta			
	R - Rust			
	HG - Hunter Green			
M - Mocha				
WB - Weathered Bronze				
WI - Weathered Iron				
W - White				

Maximum Distance Lamp to Ballast

Remote Ballast has limited starting distances. For lamp to operate efficiently, the distance from the lamp to ballast must not exceed the following:

LAMP TYPE	MAXIMUM DISTANCE
35MH	50'
70MH	50'
100MH	50'
150MH	50'
175MH	175'
50MV	175'
100MV	175'
175MV	100'
35HPS	35'
50HPS	35'
70HPS	35'
100HPS	35'
150HPS	35'

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.